




GARDEN  
PUMPS

CATALOGUE

2018

# SUBMERSIBLE PUMP

- PORTABLE
- ENERRGY SAVING
- LONGER DURATION

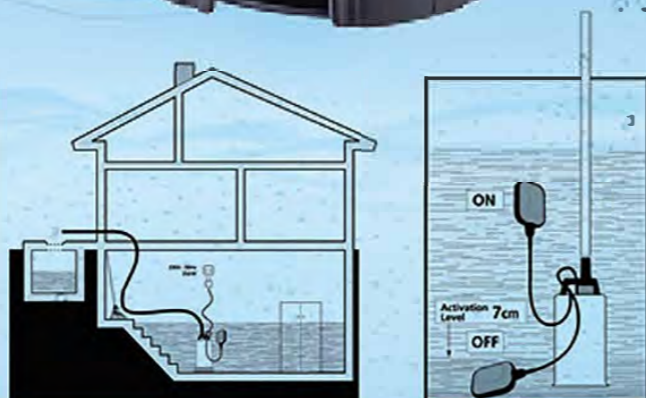


For Clean Water



FSPxx6C



FSPxx6CK

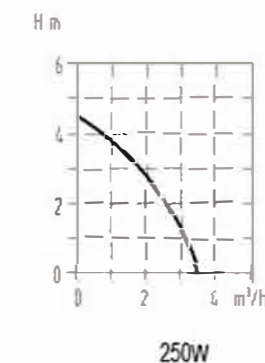

CE RoHS CB BSCI

## FSPxx6C / FSPxx6CK


"xx" standards for power watt

W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	a x b x h cm	cm³/s
250W	230V/50HZ	4.5	3500	4.5	3	1",19/25	H05 0.75	16x16x31	51x34x33

Max Temperature of Liquid: 35°C 110V/60Hz is also available



FSPxx25C

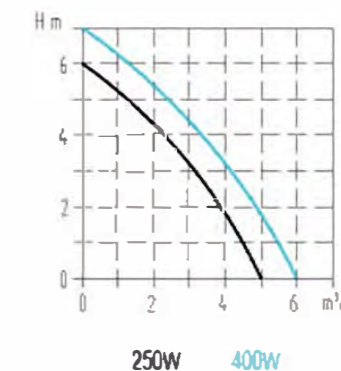

CE RoHS CB BSCI


## FSPxx25C

"xx" standards for power watt

W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	a x b x h cm	cm³/pcs
250W	230V/50HZ	6	5000	6	5	1",5/8"	H05 0.75	16x16x26	34x34x28
400W	230V/50HZ	7	6000	7	5	1",5/8"	H05 0.75	16x16x26	34x34x28

Max Temperature of Liquid: 35°C 110V/60Hz is also available

For Clean Water

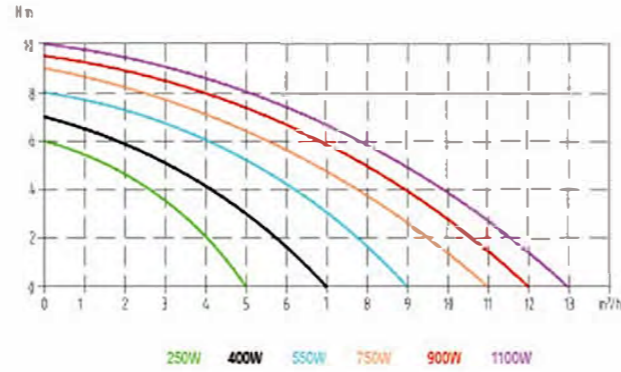


CE RoHS CB BSCI

FSPxx1C / FSPxx1CB "xx" standards for power watt

W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	a x b x h cm	cm <sup>3</sup> /pcs	pcs/20'CTN
250W	230V/50HZ	6	5000	5	5	1" ,G1" ,1-1/2"	H05RN 0.75	22×16×31	46×34×33	2300
400W	230V/50HZ	7	7000	7	5	1" ,G1" ,1-1/2"	H05RN 0.75	22×16×31	46×34×33	2300
550W	230V/50HZ	8	9000	7	5	1" ,G1" ,1-1/2"	H05RN 0.75	22×16×31	46×34×33	2300
750W	230V/50HZ	9	11000	7	5	1" ,G1" ,1-1/2"	H07RN 1.0	22×16×34	46×34×36	2040
900W	230V/50HZ	9.5	12000	7	5	1" ,G1" ,1-1/2"	H07RN 1.0	22×16×34	46×34×36	2040
1100W	230V/50HZ	10	13000	7	5	1" ,G1" ,1-1/2"	H07RN 1.0	22×16×34	46×34×36	2040

Max Temperature of Liquid: 35°C 110V/60Hz is also available

For Dirty Water

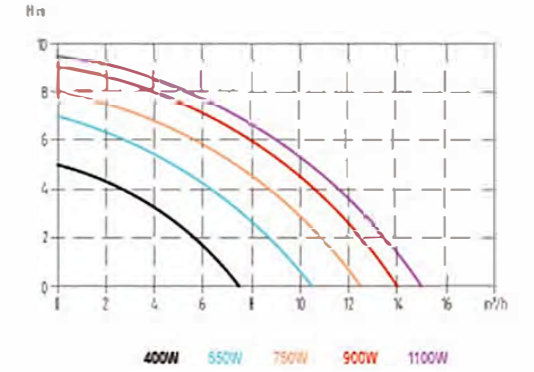


CE RoHS CB BSCI

FSPxx1DW / FSPxx1DWB "xx" standards for power watt

W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	a x b x h cm	cm <sup>3</sup> /pcs	pcs/20'CTN
400W	230V/50HZ	5	7500	5	35	1" ,G1" ,1-1/2"	H05RN 0.75	22×16×34	46×34×36	2040
550W	230V/50HZ	7	10500	7	35	1" ,G1" ,1-1/2"	H05RN 0.75	22×16×34	46×34×36	2040
750W	230V/50HZ	8	12500	7	35	1" ,G1" ,1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	2040
900W	230V/50HZ	9	14000	7	35	1" ,G1" ,1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	1900
1100W	230V/50HZ	9.5	15000	7	35	1" ,G1" ,1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	1900

Max Temperature of Liquid: 35°C 110V/60Hz is also available

For Clean Water

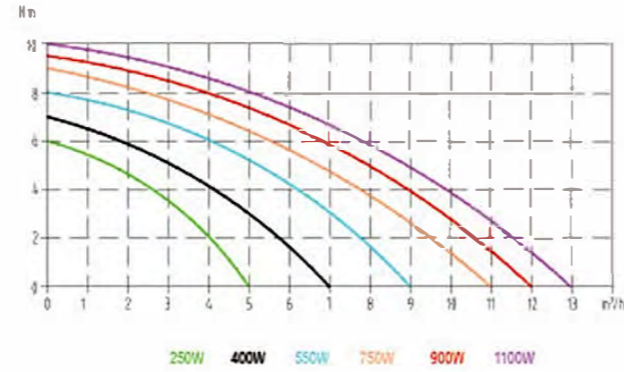

FSPxx2C



FSPxx3C

CE RoHS CB BSCI


FSPxx2C / FSPxx3C

"xx" standards for power watt

W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	a x b x h cm	cm <sup>3</sup> pcs	pcs/20°C TN
250W	230V/50HZ	6	5000	5	5	1", G1", 1-1/2"	H05RN 0.75	22x16x31	46x34x33	2300
400W	230V/50HZ	7	7000	7	5	1", G1", 1-1/2"	H05RN 0.75	22x16x31	46x34x33	2300
550W	230V/50HZ	8	9000	7	5	1", G1", 1-1/2"	H05RN 0.75	22x16x31	46x34x33	2300
750W	230V/50HZ	9	11000	7	5	1", G1", 1-1/2"	H07RN 1.0	22x16x34	46x34x36	2040
900W	230V/50HZ	9.5	12000	7	5	1", G1", 1-1/2"	H07RN 1.0	22x16x34	46x34x36	2040
1100W	230V/50HZ	10	13000	7	5	1", G1", 1-1/2"	H07RN 1.0	22x16x34	46x34x36	2040

Max Temperature of Liquid: 35°C 110V/60Hz is also available

For Dirty Water

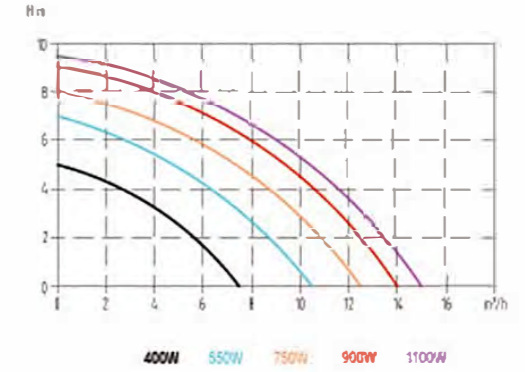

FSPxx2DW



FSPxx3DW

CE RoHS CB BSCI

FSPxx2DW / FSPxx3DW

"xx" standards for power watt

W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	a x b x h cm	cm <sup>3</sup> pcs	pcs/20°C TN
400W	230V/50HZ	5	7500	5	35	1", G1", 1-1/2"	H05RN 0.75	22x16x34	46x34x36	2040
550W	230V/50HZ	7	10500	7	35	1", G1", 1-1/2"	H05RN 0.75	22x16x34	46x34x36	2040
750W	230V/50HZ	8	12500	7	35	1", G1", 1-1/2"	H07RN 1.0	22x16x37	46x34x38.5	2040
900W	230V/50HZ	9	14000	7	35	1", G1", 1-1/2"	H07RN 1.0	22x16x37	46x34x38.5	1900
1100W	230V/50HZ	9.5	15000	7	35	1", G1", 1-1/2"	H07RN 1.0	22x16x37	46x34x38.5	1900

Max Temperature of Liquid: 35°C 110V/60Hz is also available


For Clean Water



FSPxx4C



FSPxx5C

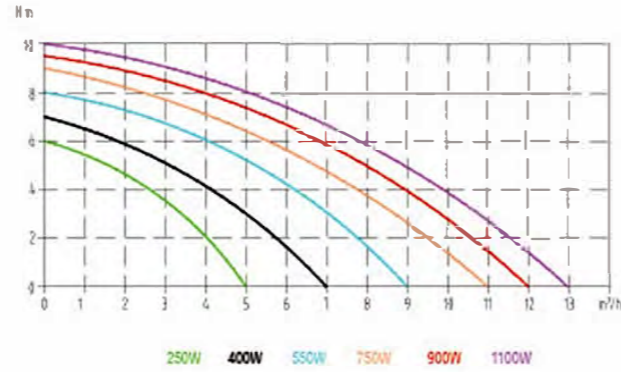


For Dirty Water



FSPxx4DW



FSPxx5DW

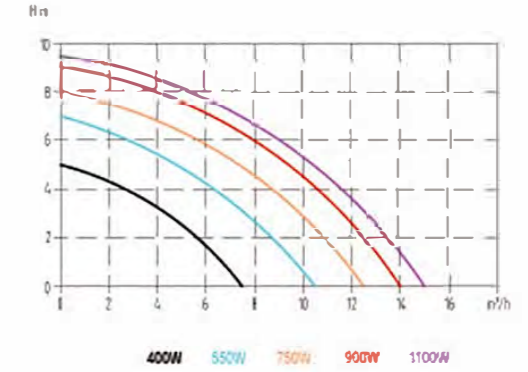

CE RoHS CB BSCI

FSPxx4C / FSPxx5C

"xx" standards for power watt

W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	axb x h cm		cm <sup>4</sup> pcs		pcs/20'CTN
								FSPxx4C	FSPxx5C	FSPxx4C	FSPxx5C	
250W	230V/50HZ	6	5000	5	5	1" ,G1" ,1-1/2"	H05RN 0.75	22×16×31	22×18×33	46×34×33	46×38×35	2040
400W	230V/50HZ	7	7000	7	5	1" ,G1" ,1-1/2"	H05RN 0.75	22×16×31	22×18×33	46×34×33	46×38×35	2040
550W	230V/50HZ	8	9000	7	5	1" ,G1" ,1-1/2"	H05RN 0.75	22×16×31	22×18×33	46×34×33	46×38×35	2040
750W	230V/50HZ	9	11000	7	5	1" ,G1" ,1-1/2"	H07RN 1.0	22×16×34	22×18×33	46×34×36	46×38×35	2040
900W	230V/50HZ	9.5	12000	7	5	1" ,G1" ,1-1/2"	H07RN 1.0	22×16×34	22×18×33	46×34×36	46×38×35	1950
1100W	230V/50HZ	10	13000	7	5	1" ,G1" ,1-1/2"	H07RN 1.0	22×16×34	22×18×33	46×34×36	46×38×35	1900

Max Temperature of Liquid: 35°C 110V/60Hz is also available

CE RoHS CB BSCI

FSPxx4DW / FSPxx5DW

"xx" standards for power watt

W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	axb x h cm		cm <sup>4</sup> pcs		pcs/20'CTN
								FSPxx4DW	FSPxx5DW	FSPxx4DW	FSPxx5DW	
400W	230V/50HZ	5	7500	5	35	1" ,G1" ,1-1/2"	H05RN 0.75	22×16×31	22×18×37	46×34×33	46×38×38.5	2040
550W	230V/50HZ	7	10500	7	35	1" ,G1" ,1-1/2"	H05RN 0.75	22×16×31	22×18×37	46×34×33	46×38×38.5	2040
750W	230V/50HZ	8	12500	7	35	1" ,G1" ,1-1/2"	H07RN 1.0	22×16×34	22×16×37	46×34×36	46×38×38.5	2040
900W	230V/50HZ	9	14000	7	35	1" ,G1" ,1-1/2"	H07RN 1.0	22×16×34	22×16×37	46×34×36	46×38×38.5	1900
1100W	230V/50HZ	9.5	15000	7	35	1" ,G1" ,1-1/2"	H07RN 1.0	22×16×34	22×16×37	46×34×36	46×38×38.5	1900

Max Temperature of Liquid: 35°C 110V/60Hz is also available

For Clean Water




FSPxx8C



FSPxx9C

- Low Cost Design
- Smaller Size
- Stable Performance

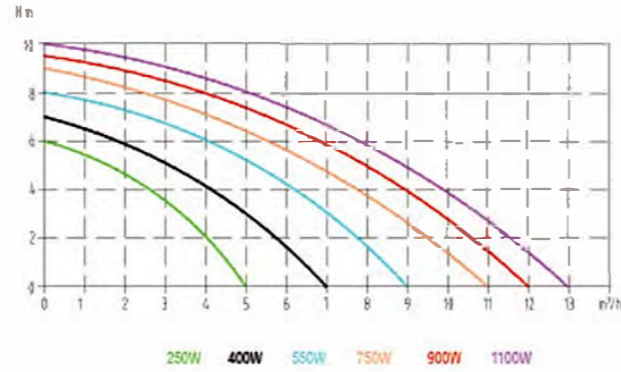

For Dirty Water




FSPxx8DW



FSPxx9DW

- Low Cost Design
- Smaller Size
- Stable Performance

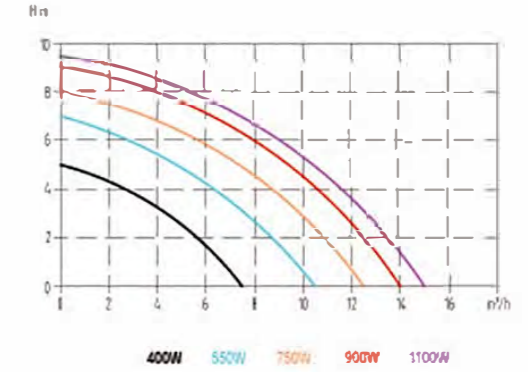

CE RoHS CB BSCI

FSPxx8C / FSPxx9C

"xx" standards for power watt

W	V/Hz	H <sub>max</sub> (m)	Q <sub>max</sub> (l/h)	H <sub>max</sub> (m)	mm	mm	10m	axb x h cm		cm <sup>3</sup> /pcs		pcs/20°C TN
								FSPxx8C	FSPxx9C	FSPxx8C	FSPxx9C	
250W	230V/50HZ	6	5000	5	5	1", G1", 1-1/2"	H05RN 0.75	46×34×33	22×16×31	46×34×33	46×34×33	2040
400W	230V/50HZ	7	7000	7	5	1", G1", 1-1/2"	H05RN 0.75	46×34×33	22×16×31	46×34×33	46×34×33	2040
550W	230V/50HZ	8	9000	7	5	1", G1", 1-1/2"	H05RN 0.75	46×34×33	22×16×31	46×34×33	46×34×33	2040
750W	230V/50HZ	9	11000	7	5	1", G1", 1-1/2"	H07RN 1.0	22×16×37	22×16×34	46×34×38.5	46×34×36	2040
900W	230V/50HZ	9.5	12000	7	5	1", G1", 1-1/2"	H07RN 1.0	22×16×37	22×16×34	46×34×38.5	46×34×36	1950
1100W	230V/50HZ	10	13000	7	5	1", G1", 1-1/2"	H07RN 1.0	22×16×37	22×16×34	46×34×38.5	46×34×36	1900

Max Temperature of Liquid: 35°C 110V/60Hz is also available

CE RoHS CB BSCI

FSPxx8DW / FSPxx9DW

"xx" standards for power watt


W	V/Hz	H <sub>max</sub> (m)	Q <sub>max</sub> (l/h)	H <sub>max</sub> (m)	mm	mm	10m	axb x h cm		cm <sup>3</sup> /pcs		pcs/20°C TN
								FSPxx8DW	FSPxx9DW	FSPxx8DW	FSPxx9DW	
400W	230V/50HZ	5	7500	5	35	1", G1", 1-1/2"	H05RN 0.75	22×16×31	22×18×37	46×34×33	46×38×38.5	2040
550W	230V/50HZ	7	10500	7	35	1", G1", 1-1/2"	H05RN 0.75	22×16×31	22×18×37	46×34×33	46×38×38.5	2040
750W	230V/50HZ	8	12500	7	35	1", G1", 1-1/2"	H07RN 1.0	22×16×34	22×16×37	46×34×36	46×38×38.5	2040
900W	230V/50HZ	9	14000	7	35	1", G1", 1-1/2"	H07RN 1.0	22×16×34	22×16×37	46×34×36	46×38×38.5	1900
1100W	230V/50HZ	9.5	15000	7	35	1", G1", 1-1/2"	H07RN 1.0	22×16×34	22×16×37	46×34×36	46×38×38.5	1900

Max Temperature of Liquid: 35°C 110V/60Hz is also available

For Dirty Water



FSPxx7DW

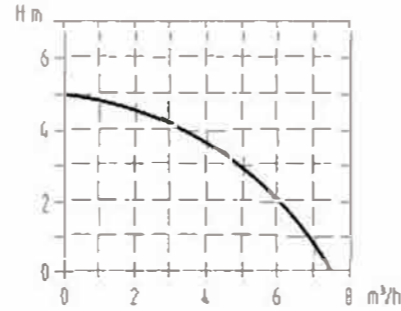

400W


CE RoHS CB BSCI

FSPxx7DW "xx" standards for power watt										
W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	axb x h cm		
400W	230V/50HZ	5	7500	7	16	1", G1", 1-1/2"	H05 0.75	16x16x31		

Max Temperature of Liquid: 35°C 110V/60Hz is also available



FSPxx13DWB

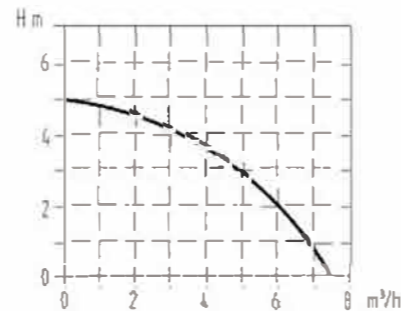

400W

CE RoHS CB BSCI


FSPxx13DWB "xx" standards for power watt										
W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	axb x h cm		
400W	230V/50HZ	5	7500	5	35	1", G1", 1-1/2"	H05 0.75	22x16x31		

Max Temperature of Liquid: 35°C 110V/60Hz is also available

For Dirty Water



FSPxx18DW

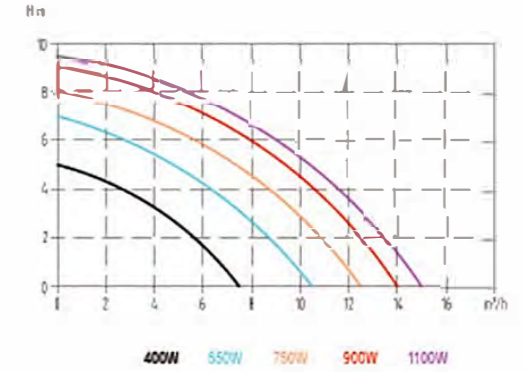

FSPxx18DWB



- Three Levels of Grain Size: 1mm, 8mm, 35mm
- Clean and Dirty Water 2 in 1 Design



Adjustable Base

CE RoHS CB BSCI


FSPxx18DW / FSPxx18DWB "xx" standards for power watt											
W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	axb x h cm	cm/4pcs	pcs/20°C TN	
400W	230V/50HZ	5	7500	5	35	1", G1", 1-1/2"	H05RN 0.75	22x18x34	46x38x36	2040	
550W	230V/50HZ	7	10500	7	35	1", G1", 1-1/2"	H05RN 0.75	22x18x34	46x38x36	2040	
750W	230V/50HZ	8	12500	7	35	1", G1", 1-1/2"	H07RN 1.0	22x18x37	46x38x38.5	2040	
900W	230V/50HZ	9	14000	7	35	1", G1", 1-1/2"	H07RN 1.0	22x18x37	46x38x38.5	1950	
1100W	230V/50HZ	9.5	15000	7	35	1", G1", 1-1/2"	H07RN 1.0	22x18x37	46x38x38.5	1900	

Max Temperature of Liquid: 35°C 110V/60Hz is also available

For Clean Water



FSPxx26C

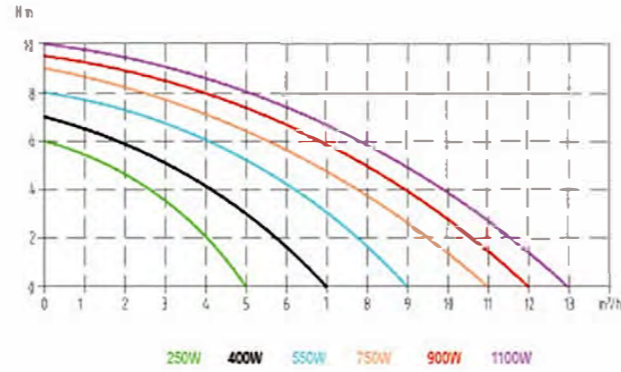


FSPxx27C

For Dirty Water



FSPxx26DW

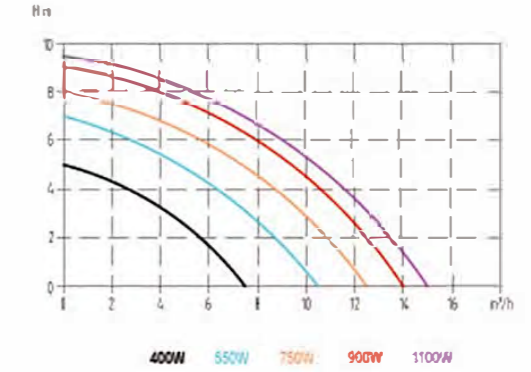

FSPxx27DW

CE RoHS CB BSCI

FSPxx26C / FSPxx27C

"xx" standards for power watt

W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	a x b x h cm	cm <sup>3</sup> pcs	pcs/20'CTN
250W	230V/50HZ	6	5000	5	5	1" ,G1" ,1-1/2"	H05RN 0.75	22x16x31	46x34x33	2040
400W	230V/50HZ	7	7000	7	5	1" ,G1" ,1-1/2"	H05RN 0.75	22x16x31	46x34x33	2040
550W	230V/50HZ	8	9000	7	5	1" ,G1" ,1-1/2"	H05RN 0.75	22x16x31	46x34x33	2040
750W	230V/50HZ	9	11000	7	5	1" ,G1" ,1-1/2"	H07RN 1.0	22x16x34	46x34x36	2040
900W	230V/50HZ	9.5	12000	7	5	1" ,G1" ,1-1/2"	H07RN 1.0	22x16x34	46x34x36	1950
1100W	230V/50HZ	10	13000	7	5	1" ,G1" ,1-1/2"	H07RN 1.0	22x16x34	46x34x36	1900

Max Temperature of Liquid: 35°C 110V/60Hz is also available

CE RoHS CB BSCI

FSPxx26DW / FSPxx27DW

"xx" standards for power watt

W	W	Q max l/h	H max m	H max m	mm	mm	10m	a x b x h cm	cm <sup>3</sup> pcs	pcs/20'CTN
400W	230V/50HZ	5	7500	5	35	1" ,G1" ,1-1/2"	H05RN 0.75	22x16x34	46x34x36	2040
550W	230V/50HZ	7	10500	7	35	1" ,G1" ,1-1/2"	H05RN 0.75	22x16x34	46x34x36	2040
750W	230V/50HZ	8	12500	7	35	1" ,G1" ,1-1/2"	H07RN 1.0	22x16x37	46x34x38.5	2040
900W	230V/50HZ	9	14000	7	35	1" ,G1" ,1-1/2"	H07RN 1.0	22x16x37	46x34x38.5	1900
1100W	230V/50HZ	9.5	15000	7	35	1" ,G1" ,1-1/2"	H07RN 1.0	22x16x37	46x34x38.5	1900

Max Temperature of Liquid: 35°C 110V/60Hz is also available




For Dirty Water



FSPxx27DWB



FSPxx26DWB

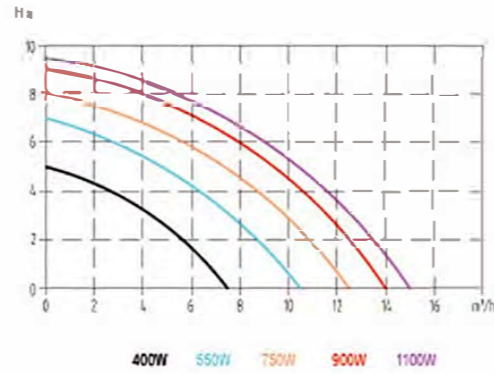

CE RoHS CB BSCI

FSPxx26DWB / FSPxx27DWB "xx" standards for power watt

W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	a x b x h cm	cm/4pcs	pos/20°C TN
400W	230V/50HZ	5	7500	5	35	1" ,G1" ,1-1/2"	H05RN 0.75	22×16×34	46×34×36	2040
550W	230V/50HZ	7	10500	7	35	1" ,G1" ,1-1/2"	H05RN 0.75	22×16×34	46×34×36	2040
750W	230V/50HZ	8	12500	7	35	1" ,G1" ,1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	2040
900W	230V/50HZ	9	14000	7	35	1" ,G1" ,1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	1900
1100W	230V/50HZ	9.5	15000	7	35	1" ,G1" ,1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	1900

Max Temperature of Liquid: 35°C 110V/60Hz is also available


For Dirty Water



FSPxx27DWS



FSPxx26DWS

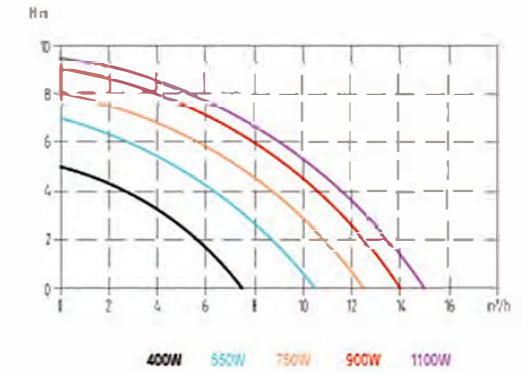


CE RoHS CB BSCI

FSPxx26DWS / FSPxx27DWS "xx" standards for power watt

W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	a x b x h cm	cm/4pcs	pos/20°C TN
400W	230V/50HZ	5	7500	5	35	1" ,G1" ,1-1/2"	H05RN 0.75	22×16×34	46×34×36	2040
550W	230V/50HZ	7	10500	7	35	1" ,G1" ,1-1/2"	H05RN 0.75	22×16×34	46×34×36	2040
750W	230V/50HZ	8	12500	7	35	1" ,G1" ,1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	2040
900W	230V/50HZ	9	14000	7	35	1" ,G1" ,1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	1900
1100W	230V/50HZ	9.5	15000	7	35	1" ,G1" ,1-1/2"	H07RN 1.0	22×16×37	46×34×38.5	1900

Max Temperature of Liquid: 35°C 110V/60Hz is also available

For Clean Water

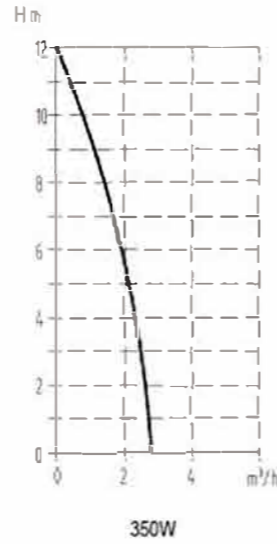

Best for Irrigation from Rain Barrel



CE RoHS CB BSCI


FSP3501CR / FSP3502CR

"xx" standards for power watt

W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	a x b x h cm	cm/4pcs	pcs/20'CTN
350W	230V/50HZ	12	2400	7	3	3/4"	H05RN 0.75	22x16x37	46x34x38.5	2100

Max Temperature of Liquid: 35°C 110V/60Hz is also available

For Clean Water

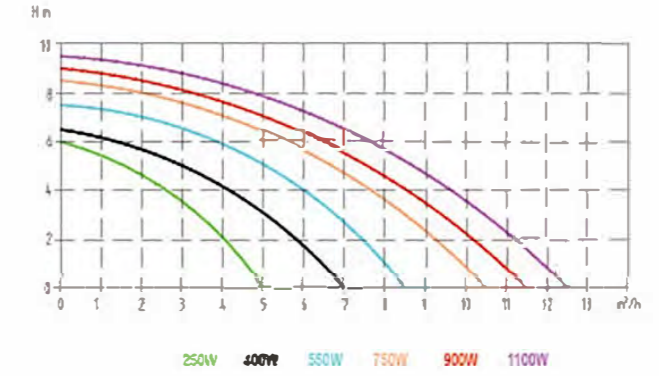

FSPxx3CB

- Top Outlet
- Stainless Body
- Plastic Base



FSPxx4CB



Different Style of Handle

CE RoHS CB BSCI

FSPxx3CB / FSPxx4CB

"xx" standards for power watt

W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	a x b x h cm	cm/4pcs	pcs/20'CTN
250W	230V/50HZ	6	5000	5	5	1" ,G1" ,1-1/2"	H05RN 0.75	22x18x31	46x36x33	2300
400W	230V/50HZ	6.5	7000	7	5	1" ,G1" ,1-1/2"	H05RN 0.75	22x18x31	46x36x33	2300
550W	230V/50HZ	7.5	8500	7	5	1" ,G1" ,1-1/2"	H05RN 0.75	22x18x31	46x36x33	2300
750W	230V/50HZ	8.5	10500	7	5	1" ,G1" ,1-1/2"	H07RN 1.0	22x18x31	46x36x33	2040
900W	230V/50HZ	9	11500	7	5	1" ,G1" ,1-1/2"	H07RN 1.0	22x18x31	46x36x33	2040
1100W	230V/50HZ	9.5	12500	7	5	1" ,G1" ,1-1/2"	H07RN 1.0	22x18x31	46x36x33	2040

Max Temperature of Liquid: 35°C 110V/60Hz is also available

For Clean Water



FSPxx1CBX


- Side Outlet
- Stainless Body
- Plastic Base



FSPxx2CBX



Different Style of Handle

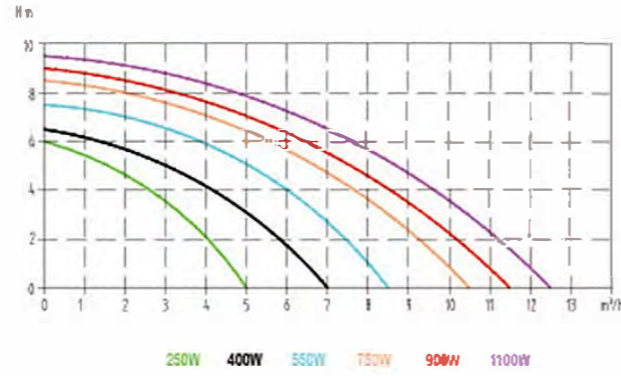

CE RoHS CB BSCI

FSPxx1CBX / FSPxx2CBX

"xx" standards for power watt

W	V/Hz	H <sub>max</sub> (m)	Q <sub>max</sub> (l/h)	H <sub>max</sub> (m)	mm	mm	10m	a x b x h (cm)	cm <sup>4</sup> pcs	pcs/20'CTN
250W	230V/50HZ	6	5000	5	5	1" ,G1" ,1-1/2"	H05RN 0.75	22x18x31	46x36x33	2300
400W	230V/50HZ	6.5	7000	7	5	1" ,G1" ,1-1/2"	H05RN 0.75	22x18x31	46x36x33	2300
550W	230V/50HZ	7.5	8500	7	5	1" ,G1" ,1-1/2"	H05RN 0.75	22x18x31	46x36x33	2300
750W	230V/50HZ	8.5	10500	7	5	1" ,G1" ,1-1/2"	H07RN 1.0	22x18x31	46x36x33	2040
900W	230V/50HZ	9	11500	7	5	1" ,G1" ,1-1/2"	H07RN 1.0	22x18x31	46x36x33	2040
1100W	230V/50HZ	9.5	12500	7	5	1" ,G1" ,1-1/2"	H07RN 1.0	22x18x31	46x36x33	2040

Max Temperature of Liquid: 35°C 110V/60Hz is also available

For Clean Water



FSPxx4CS-4


- Full Stainless



FSPxx3CS-2



Double Layers

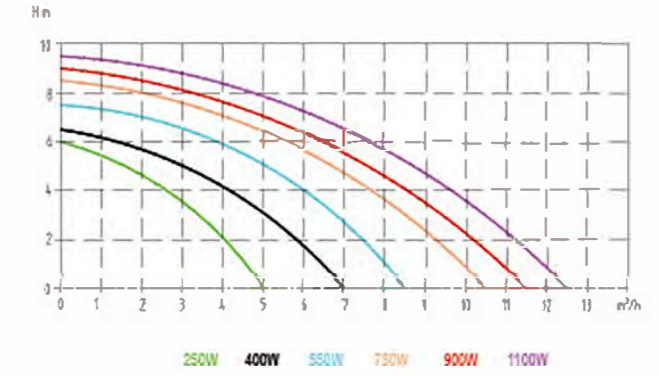

CE RoHS CB BSCI

FSPxx4CS-4 / FSPxx3CS-2

"xx" standards for power watt

W	V/Hz	H <sub>max</sub> (m)	Q <sub>max</sub> (l/h)	H <sub>max</sub> (m)	mm	mm	10m	a x b x h (cm)	cm <sup>4</sup> pcs	pcs/20'CTN
250W	230V/50HZ	6	5000	5	5	1" ,G1" ,1-1/2"	H05RN 0.75	22x18x31	46x36x33	2300
400W	230V/50HZ	6.5	7000	7	5	1" ,G1" ,1-1/2"	H05RN 0.75	22x18x31	46x36x33	2300
550W	230V/50HZ	7.5	8500	7	5	1" ,G1" ,1-1/2"	H05RN 0.75	22x18x31	46x36x33	2300
750W	230V/50HZ	8.5	10500	7	5	1" ,G1" ,1-1/2"	H07RN 1.0	22x18x31	46x36x33	2040
900W	230V/50HZ	9	11500	7	5	1" ,G1" ,1-1/2"	H07RN 1.0	22x18x31	46x36x33	2040
1100W	230V/50HZ	9.5	12500	7	5	1" ,G1" ,1-1/2"	H07RN 1.0	22x18x31	46x36x33	2040

Max Temperature of Liquid: 35°C 110V/60Hz is also available

For Clean Water




FSPxx1CS-3

- Full Stainless



FSPxx2CS-4

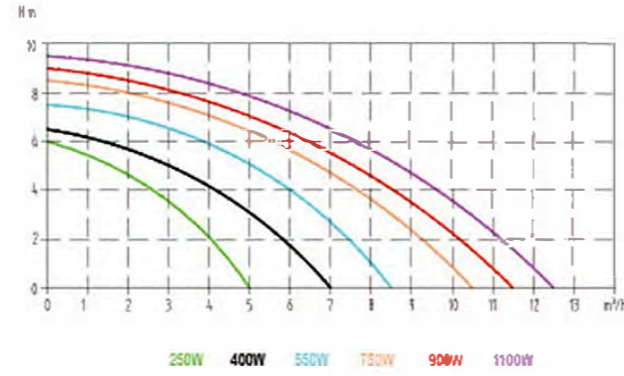

Different Style of Handle

CE RoHS CB BSCI

FSPxx1CS-3 / FSPxx2CS-4 "xx" standards for power watt

W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	a x b x h cm	cm <sup>3</sup> pcs	pcs/20'CTN
250W	230V/50HZ	6	5000	5	5	1" ,G1" ,1-1/2"	H05RN 0.75	22x18x31	46x36x33	2300
400W	230V/50HZ	6.5	7000	7	5	1" ,G1" ,1-1/2"	H05RN 0.75	22x18x31	46x36x33	2300
550W	230V/50HZ	7.5	8500	7	5	1" ,G1" ,1-1/2"	H05RN 0.75	22x18x31	46x36x33	2300
750W	230V/50HZ	8.5	10500	7	5	1" ,G1" ,1-1/2"	H07RN 1.0	22x18x31	46x36x33	2040
900W	230V/50HZ	9	11500	7	5	1" ,G1" ,1-1/2"	H07RN 1.0	22x18x31	46x36x33	2040
1100W	230V/50HZ	9.5	12500	7	5	1" ,G1" ,1-1/2"	H07RN 1.0	22x18x31	46x36x33	2040

Max Temperature of Liquid: 35°C 110V/60Hz is also available

For Clean Water




FSPxx5CS-5

- Full Stainless



FSPxx5CS-6

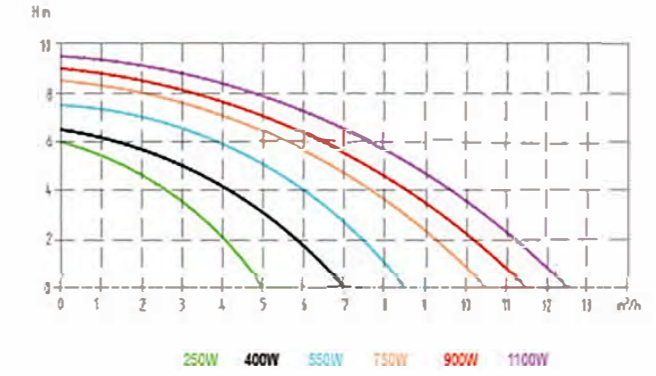

Different Style of Base

CE RoHS CB BSCI

FSPxx5CS-5 / FSPxx5CS-6 "xx" standards for power watt

W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	a x b x h cm	cm <sup>3</sup> pcs	pcs/20'CTN
250W	230V/50HZ	6	5000	5	5	1" ,G1" ,1-1/2"	H05RN 0.75	22x18x31	46x36x33	2300
400W	230V/50HZ	6.5	7000	7	5	1" ,G1" ,1-1/2"	H05RN 0.75	22x18x31	46x36x33	2300
550W	230V/50HZ	7.5	8500	7	5	1" ,G1" ,1-1/2"	H05RN 0.75	22x18x31	46x36x33	2300
750W	230V/50HZ	8.5	10500	7	5	1" ,G1" ,1-1/2"	H07RN 1.0	22x18x31	46x36x33	2040
900W	230V/50HZ	9	11500	7	5	1" ,G1" ,1-1/2"	H07RN 1.0	22x18x31	46x36x33	2040
1100W	230V/50HZ	9.5	12500	7	5	1" ,G1" ,1-1/2"	H07RN 1.0	22x18x31	46x36x33	2040


Max Temperature of Liquid: 35°C 110V/60Hz is also available

For Clean Water



- Side Outlet
- Stainless Body
- Plastic Base

FSPxx1CB-7

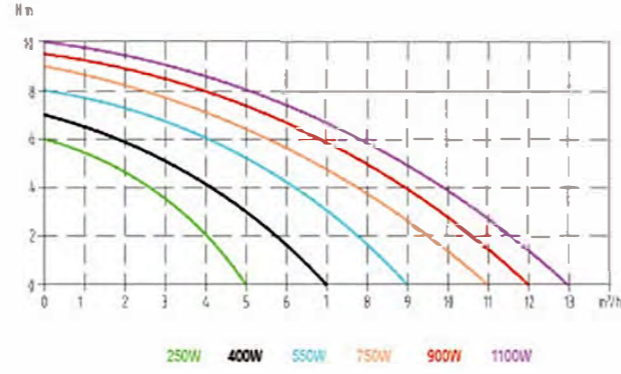

FSPxx3CB-7



Different Style of Handle

CE RoHS CB BSCI

FSPxx1CB-7 / FSPxx3CB-7

"xx" standards for power watt

W	V/Hz	H <sub>max</sub> m	Q <sub>max</sub> l/h	H <sub>max</sub> m	mm	mm	10m	a x b x h cm	cm <sup>3</sup> pcs	pcs/20°C TN
250W	230V/50HZ	6	5000	5	5	1", G1", 1-1/2"	H05RN 0.75	22x16x31	46x34x33	2300
400W	230V/50HZ	7	7000	7	5	1", G1", 1-1/2"	H05RN 0.75	22x16x31	46x34x33	2300
550W	230V/50HZ	8	9000	7	5	1", G1", 1-1/2"	H05RN 0.75	22x16x31	46x34x33	2300
750W	230V/50HZ	9	11000	7	5	1", G1", 1-1/2"	H07RN 1.0	22x16x34	46x34x36	2040
900W	230V/50HZ	9.5	12000	7	5	1", G1", 1-1/2"	H07RN 1.0	22x16x34	46x34x36	2040
1100W	230V/50HZ	10	13000	7	5	1", G1", 1-1/2"	H07RN 1.0	22x16x34	46x34x36	2040


Max Temperature of Liquid: 35°C 110V/60Hz is also available

For Dirty Water



- Stainless Body
- Plastic Base

FSPxx1DWB-6

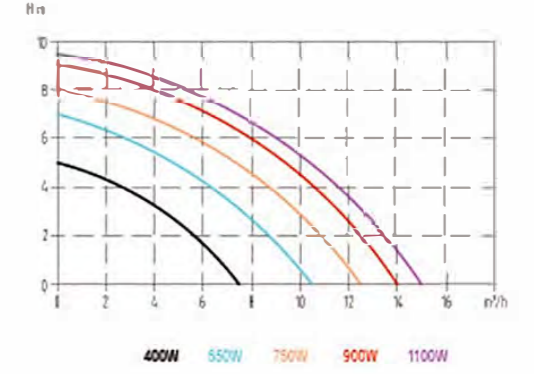

FSPxx3DWB-7



Different Style of Handle

CE RoHS CB BSCI

FSPxx1DWB-6 / FSPxx3DWB-7

"xx" standards for power watt

W	V/Hz	H <sub>max</sub> m	Q <sub>max</sub> l/h	H <sub>max</sub> m	mm	mm	10m	a x b x h cm	cm <sup>3</sup> pcs	pcs/20°C TN
400W	230V/50HZ	5	7500	5	35	1", G1", 1-1/2"	H05RN 0.75	22x16x34	46x34x36	2040
550W	230V/50HZ	7	10500	7	35	1", G1", 1-1/2"	H05RN 0.75	22x16x34	46x34x36	2040
750W	230V/50HZ	8	12500	8	35	1", G1", 1-1/2"	H07RN 1.0	22x16x37	46x34x38.5	1950
900W	230V/50HZ	9	14000	8	35	1", G1", 1-1/2"	H07RN 1.0	22x16x37	46x34x38.5	1900
1100W	230V/50HZ	9.5	15000	8	35	1", G1", 1-1/2"	H07RN 1.0	22x16x37	46x34x38.5	1900

Max Temperature of Liquid: 35°C 110V/60Hz is also available

For Dirty Water



FSPxx1DWB-8

- Two Outlets
- High Flow Rate
- Stainless Body
- Plastic Base



FSPxx2DWB-8



Different Style of Handle

CE RoHS CB BSCI

FSPxx1DWB-8 / FSPxx2DWB-8

"xx" standards for power watt

W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	a x b x h cm	cm4pcs	pos20°C/N
400W	230V/50HZ	5	9500	5	35	1", G1", 1-1/2"	H05RN 0.75	22.5x22.5x35	46.5x24x37	1440
550W	230V/50HZ	7	12000	7	35	1", G1", 1-1/2"	H05RN 0.75	22.5x22.5x35	46.5x24x37	1440
750W	230V/50HZ	8	15000	7	35	1", G1", 1-1/2"	H07RN 1.0	22.5x22.5x37	46.5x24x39	1440
900W	230V/50HZ	9	17000	7	35	1", G1", 1-1/2"	H07RN 1.0	22.5x22.5x37	46.5x24x39	1440
1100W	230V/50HZ	9.5	19000	7	35	1", G1", 1-1/2"	H07RN 1.0	22.5x22.5x37	46.5x24x39	1440

Max Temperature of Liquid: 35°C 110V/60Hz is also available

For Dirty Water



FSPxx1DWS-1

- Stainless Body



FSPxx2DWS-2

- Stainless Body



Different Style of Handle



CE RoHS CB BSCI

FSPxx1DWS-1 / FSPxx2DWS-2

"xx" standards for power watt

W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	a x b x h cm	cm4pcs	pos20°C/N
400W	230V/50HZ	5	7500	5	35	1", G1", 1-1/2"	H05RN 0.75	22x16x34	46x34x36	2040
550W	230V/50HZ	7	10500	7	35	1", G1", 1-1/2"	H05RN 0.75	22x16x34	46x34x36	2040
750W	230V/50HZ	8	12500	7	35	1", G1", 1-1/2"	H07RN 1.0	22x16x37	46x34x38.5	1950
900W	230V/50HZ	9	14000	7	35	1", G1", 1-1/2"	H07RN 1.0	22x16x37	46x34x38.5	1900
1100W	230V/50HZ	9.5	15000	7	35	1", G1", 1-1/2"	H07RN 1.0	22x16x37	46x34x38.5	1900

Max Temperature of Liquid: 35°C 110V/60Hz is also available

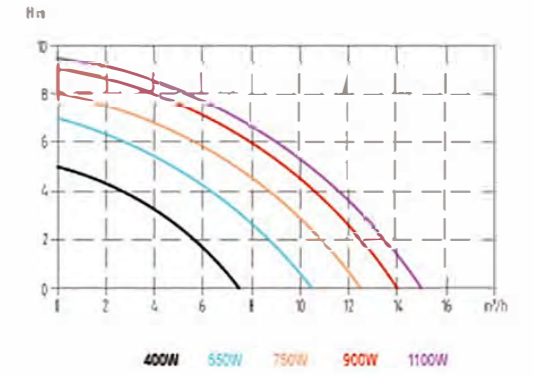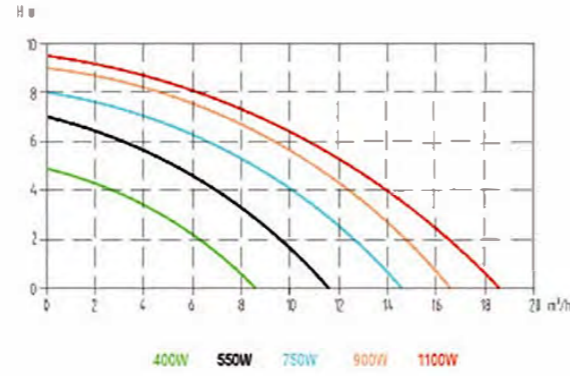

For Dirty Water



FSPxx3DWS-3


- Full Stainless



FSPxx2DWS-4



Different Style of Handle

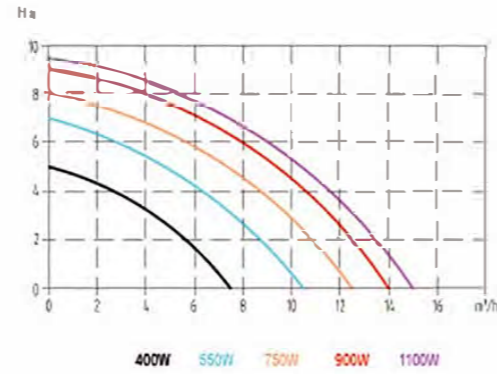

CE RoHS CB BSCI

FSPxx3DWS-3 / FSPxx2DWS-4

"xx" standards for power watt

W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	a x b x h cm	cm/4pcs	pcs/20°C/IN
400W	230V/50HZ	5	7500	5	35	1", G1", 1-1/2"	H05RN 0.75	22x16x34	46x34x36	2040
550W	230V/50HZ	7	10500	7	35	1", G1", 1-1/2"	H05RN 0.75	22x16x34	46x34x36	2040
750W	230V/50HZ	8	12500	8	35	1", G1", 1-1/2"	H07RN 1.0	22x16x37	46x34x38.5	1950
900W	230V/50HZ	9	14000	8	35	1", G1", 1-1/2"	H07RN 1.0	22x16x37	46x34x38.5	1900
1100W	230V/50HZ	9.5	15000	8	35	1", G1", 1-1/2"	H07RN 1.0	22x16x37	46x34x38.5	1900

Max Temperature of Liquid: 35°C 110V/60Hz is also available


For Clean Water



FSPxxHC



- High Lift, Up to 35m  
- Stainless Body

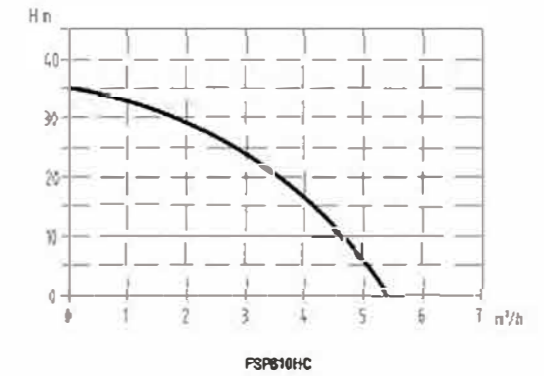

CE RoHS CB BSCI

FSPxxHC

"xx" standards for power watt


W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	a x b x h cm	cm/4pcs	pcs/20°C/IN
810W	230V/50HZ	35	5400	7	5	1"	H07RN 1.0	22x16x37	46x38x39	1900



FSPxx19C



Built-in Float Switch

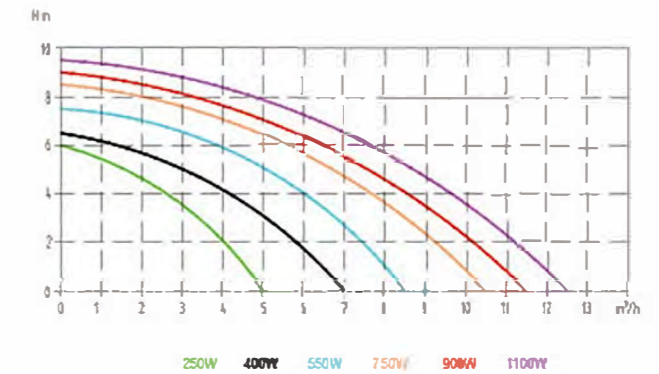

CE RoHS CB BSCI

FSPxx19C

"xx" standards for power watt



W	V/Hz	H max m	Q max l/h	H max m	mm	mm	10m	a x b x h cm	cm/4pcs	pcs/20°C/IN
250W	230V/50HZ	6	5000	5	5	1", G1", 1-1/2"	H05RN 0.75	22x18x31	46x38x33	2300
400W	230V/50HZ	6.5	7000	7	5	1", G1", 1-1/2"	H05RN 0.75	22x18x31	46x38x33	2300
550W	230V/50HZ	7.5	8500	7	5	1", G1", 1-1/2"	H05RN 0.75	22x18x31	46x38x33	2300
750W	230V/50HZ	8.5	10500	7	5	1", G1", 1-1/2"	H07RN 1.0	22x18x31	46x38x33	2040
900W	230V/50HZ	9	11500	7	5	1", G1", 1-1/2"	H07RN 1.0	22x18x31	46x38x33	2040
1100W	230V/50HZ	9.5	12500	7	5	1", G1", 1-1/2"	H07RN 1.0	22x18x31	46x38x33	2040

Max Temperature of Liquid: 35°C 110V/60Hz is also available


Vibration pump



VMP180 / VMP280

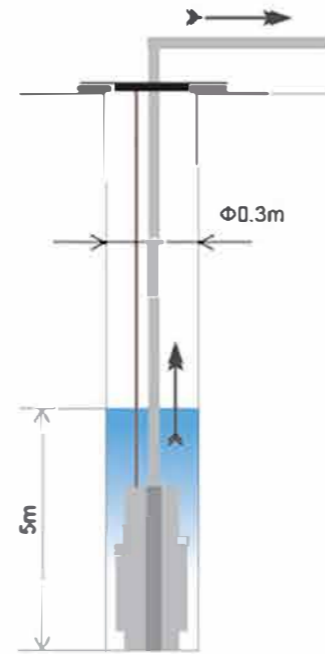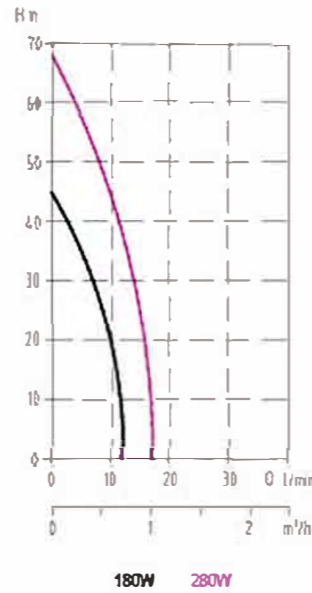

VMP350



CE RoHS CB BSCI


VMP180 / VMP280 / VMP350

W	Voltz	H <sub>max</sub> m	Q <sub>max</sub> l/h	mm	m
180	230V/50HZ	45	720	17	H050.5mm²×10m
280	230V/50HZ	68	1020	19	H050.5mm²×10m
350	230V/50HZ	70	1140	19	H050.5mm²×10m

Max Temperature of Liquid: 35°C 110V/60Hz is also available

# GARDEN PUMP

- PORTABLE
- SELF PRIMING
- PRESSURE CONTROLLER IS OPTIONAL

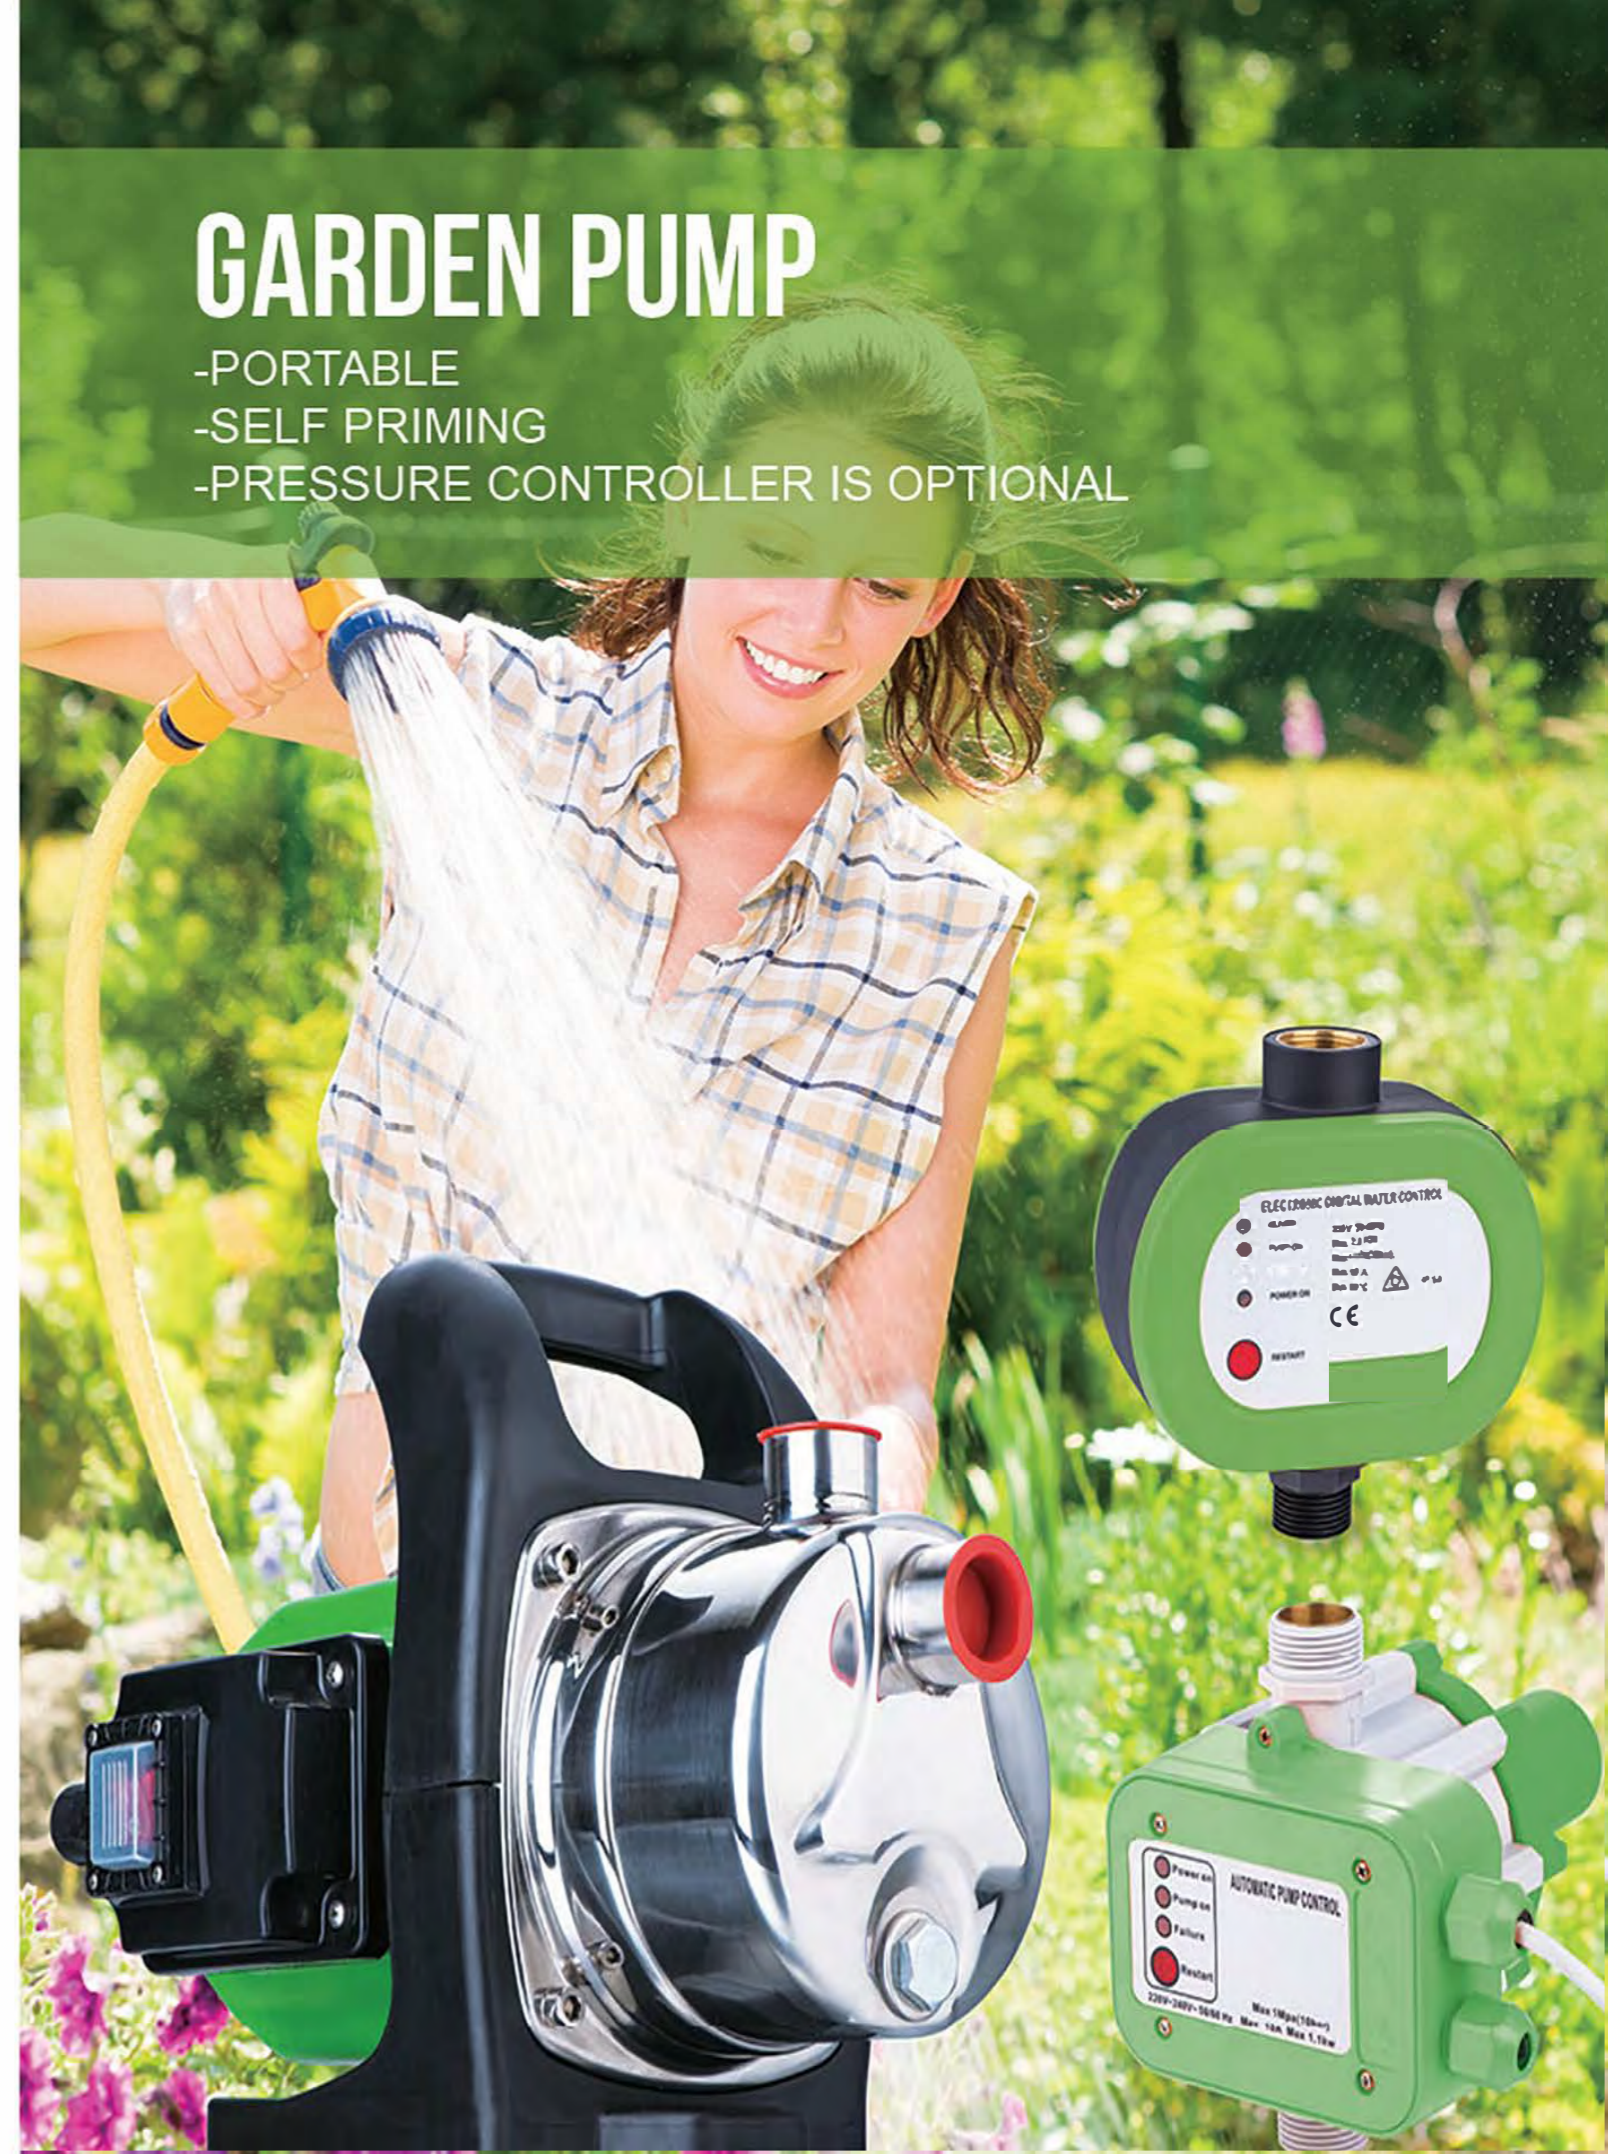





- Plastic Head
- Different Style of Handle

CE RoHS CB BSCI

**FGPxx2J / FGPxx3J / FGPxx4J** "xx" standards for power watt

W	V/Hz	H <sub>max</sub> m	Q <sub>max</sub> l/h	S <sub>max</sub> m	mm	m	a x b x h cm	cm/pcs	pcs/20°C/1N
600W	230V/50HZ	35	2800	7	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240
800W	230V/50HZ	40	3000	8	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240
1000W	230V/50HZ	44	3200	8	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240
1200W	230V/50HZ	46	3500	8	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240

Max Temperature of Liquid: 35°C 110V/60Hz is also available



- Stainless Head
- Different Style of Handle

CE RoHS CB BSCI

**FGPxx2JB / FGPxx3JB / FGPxx4JB** "xx" standards for power watt

W	V/Hz	H <sub>max</sub> m	Q <sub>max</sub> l/h	S <sub>max</sub> m	mm	m	a x b x h cm	cm/pcs	pcs/20°C/1N
600W	230V/50HZ	35	2800	7	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240
800W	230V/50HZ	40	3000	8	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240
1000W	230V/50HZ	44	3200	8	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240
1200W	230V/50HZ	46	3500	8	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240

Max Temperature of Liquid: 35°C 110V/60Hz is also available



FGPxx4

FGPxx3

FGPxx2

- Plastic Head With Extra Plastic Shell
- Different Style of Handle

CE RoHS CB BSCI

FGPxx2 / FGPxx3 / FGPxx4

“xx” standards for power watt

W	V/Hz	H <sub>max</sub> (m)	Q <sub>max</sub> (l/h)	S <sub>max</sub> (m)	mm	m	a x b x h (cm)	cm <sup>2</sup> /pcs	pcs/20°C/CTN
600W	230V/50HZ	35	2800	7	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240
800W	230V/50HZ	40	3000	8	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240
1000W	230V/50HZ	44	3200	8	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240
1200W	230V/50HZ	46	3500	8	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240

Max Temperature of Liquid: 35°C 110V/60Hz is also available



FGPxx3B

FGPxx4B

FGPxx2B

- Stainless Head With Extra Plastic Shell
- Different Style of Handle

CE RoHS CB BSCI

FGPxx2B / FGPxx3B / FGPxx4B

“xx” standards for power watt

W	V/Hz	H <sub>max</sub> (m)	Q <sub>max</sub> (l/h)	S <sub>max</sub> (m)	mm	m	a x b x h (cm)	cm <sup>2</sup> /pcs	pcs/20°C/CTN
600W	230V/50HZ	35	2800	7	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240
800W	230V/50HZ	40	3000	8	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240
1000W	230V/50HZ	44	3200	8	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240
1200W	230V/50HZ	46	3500	8	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240

Max Temperature of Liquid: 35°C 110V/60Hz is also available



CE RoHS CB BSCI

FGPxx1J / FGPxx1JB / FGPxx1B										"xx" standards for power watt									
W	V/Hz	H max m	Q max l/h	S max m	mm	m	a x b x h cm	cm/pcs	pcs/20°C/1N	W	V/Hz	H max m	Q max l/h	S max m	mm	m	a x b x h cm	cm/pcs	pcs/20°C/1N
600W	230V/50HZ	35	2800	7	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240	600W	230V/50HZ	35	2800	7	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240
800W	230V/50HZ	40	3000	8	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240	800W	230V/50HZ	40	3000	8	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240
1000W	230V/50HZ	44	3200	8	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240	1000W	230V/50HZ	44	3200	8	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240
1200W	230V/50HZ	46	3500	8	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240	1200W	230V/50HZ	46	3500	8	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240

Max Temperature of Liquid: 35°C 110V/60Hz is also available





CE RoHS CB BSCI

FGPxx2JF / FGPxx5J / FGPxx6J										"xx" standards for power watt									
W	V/Hz	H max m	Q max l/h	S max m	mm	m	a x b x h cm	cm/pcs	pcs/20°C/1N	W	V/Hz	H max m	Q max l/h	S max m	mm	m	a x b x h cm	cm/pcs	pcs/20°C/1N
600W	230V/50HZ	35	2800	7	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240	600W	230V/50HZ	35	2800	7	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240
800W	230V/50HZ	40	3000	8	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240	800W	230V/50HZ	40	3000	8	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240
1000W	230V/50HZ	44	3200	8	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240	1000W	230V/50HZ	44	3200	8	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240
1200W	230V/50HZ	46	3500	8	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240	1200W	230V/50HZ	46	3500	8	1"	H07RN 1.0mm <sup>2</sup> ×1.2	37.5×23×27	45×39×28	1240

Max Temperature of Liquid: 35°C 110V/60Hz is also available

# GARDEN PUMP WITH BOOSTER SYSTEM

- LOW NOISE
- RELIABLE PERFORMANCE
- SELF PRIMING

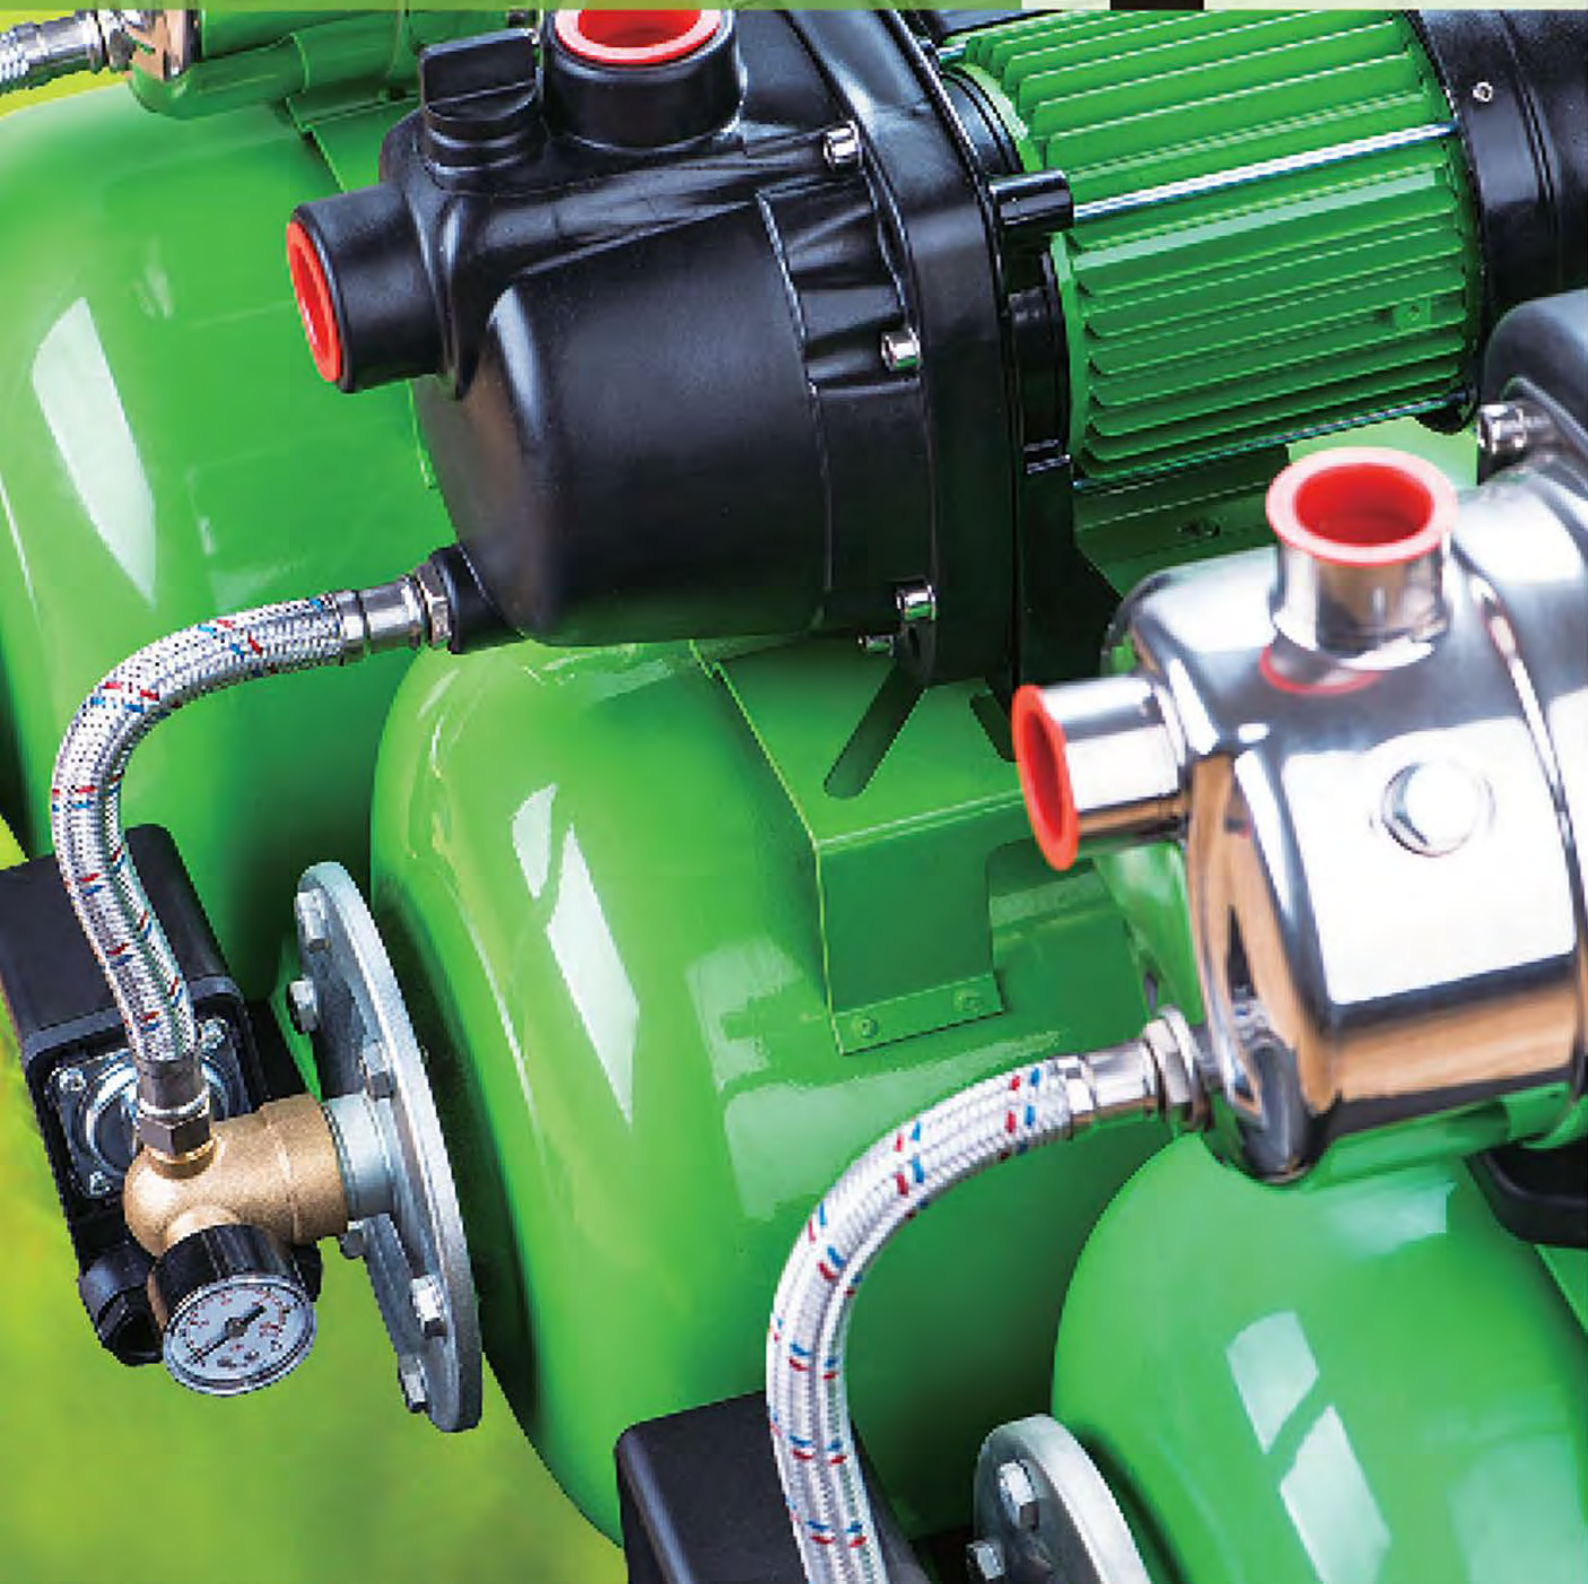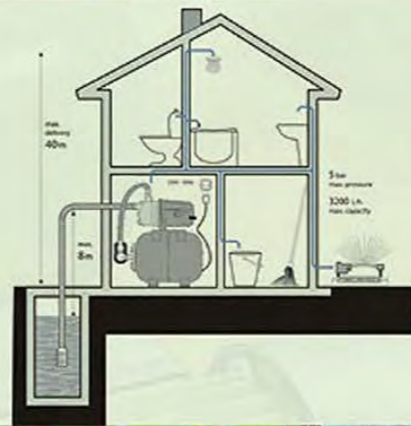

FGPxxBD

FGPxxD

FGPxxJBD

FGPxxJD

- Short Flexible Hose
- 19L, 24L or 50L Steel Tank

CE RoHS CB BSCI

FGPxxBD / FGPxxD / FGPxxJBD / FGPxxJD

"xx" standards for power watt

W	V/Hz	H max m	Q max l/h	max bar	S max m	Ø mm	m	a x b x h cm	cm/lpc	pack/PCTN
600W	230V/50HZ	35	2800	1.2-3.0	7	1"	H07RN 1.0mm <sup>2</sup> ×1.2	46.5×33×57	47×33.5×57.5	380
800W	230V/50HZ	40	3000	1.2-3.0	8	1"	H07RN 1.0mm <sup>2</sup> ×1.2	46.5×33×57	47×33.5×57.5	380
1000W	230V/50HZ	44	3200	1.2-3.0	8	1"	H07RN 1.0mm <sup>2</sup> ×1.2	46.5×33×57	47×33.5×57.5	380
1200W	230V/50HZ	46	3500	1.2-3.0	8	1"	H07RN 1.0mm <sup>2</sup> ×1.2	46.5×33×57	47×33.5×57.5	380

Max Temperature of Liquid: 35°C 110V/60Hz is also available



FGPxxC

FGPxxBC

FGPxxJC

FGPxxJBC

- Long Flexible Hose
- 19L,24L or 50L Steel Tank

CE RoHS CB BSCI

FGPxxC / FGPxxBC / FGPxxJC / FGPxxJBC											"xx" standards for power watt
W	V/Hz	H max m	Q max l/h	bar	S max m	mm	m	a x b x h cm	cm³/pcs	pcs/20CTN	
600W	230V/50HZ	35	2800	1.2-3.0	7	1"	H07RN 1.0mm²x1.2	46.5x33x57	47x33.5x57.5	380	
800W	230V/50HZ	40	3000	1.2-3.0	8	1"	H07RN 1.0mm²x1.2	46.5x33x57	47x33.5x57.5	380	
1000W	230V/50HZ	44	3200	1.2-3.0	8	1"	H07RN 1.0mm²x1.2	46.5x33x57	47x33.5x57.5	380	
1200W	230V/50HZ	46	3500	1.2-3.0	8	1"	H07RN 1.0mm²x1.2	46.5x33x57	47x33.5x57.5	380	

Max Temperature of Liquid: 35°C 110V/60Hz is also available



FGPxxJBDS

FGPxxJBCS

FGPxxBCS

- Long Flexible Hose
- 19L,24L or 50L Stainless Tank


CE RoHS CB BSCI

FGPxxJBDS / FGPxxBCS / FGPxxJBCS											"xx" standards for power watt
W	V/Hz	H max m	Q max l/h	bar	S max m	mm	m	a x b x h cm	cm³/pcs	pcs/20CTN	
600W	230V/50HZ	35	2800	1.2-3.0	7	1"	H07RN 1.0mm²x1.2	46.5x33x57	47x33.5x57.5	380	
800W	230V/50HZ	40	3000	1.2-3.0	8	1"	H07RN 1.0mm²x1.2	46.5x33x57	47x33.5x57.5	380	
1000W	230V/50HZ	44	3200	1.2-3.0	8	1"	H07RN 1.0mm²x1.2	46.5x33x57	47x33.5x57.5	380	
1200W	230V/50HZ	46	3500	1.2-3.0	8	1"	H07RN 1.0mm²x1.2	46.5x33x57	47x33.5x57.5	380	

Max Temperature of Liquid: 35°C 110V/60Hz is also available



- Low Cost Design
- Plastic Head
- Short Flexible Hose

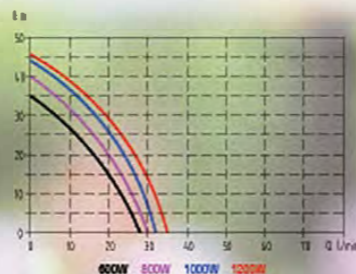

- Cast Iron Head
- Short Flexible Hose

CE RoHS CB BSCI

**FGPxx5JD / FGPxxJDF / FGPxx6JDF**

"xx" standards for power watt

W	V/Hz	H max m	Q max l/h	Pressure bar	S max m	mm	m	a x b x h cm	cm³/pcs	pcs/20CTN
600W	230V/50HZ	35	2800	1.2-3.0	7	1"	H07RN 1.0mm²x1.2	46.5x33x57	47x33.5x57.5	380
800W	230V/50HZ	40	3000	1.2-3.0	8	1"	H07RN 1.0mm²x1.2	46.5x33x57	47x33.5x57.5	380
1000W	230V/50HZ	44	3200	1.2-3.0	8	1"	H07RN 1.0mm²x1.2	46.5x33x57	47x33.5x57.5	380
1200W	230V/50HZ	46	3500	1.2-3.0	8	1"	H07RN 1.0mm²x1.2	46.5x33x57	47x33.5x57.5	380

Max Temperature of Liquid: 35°C 110V/60Hz is also available


**QB Surface Pump**



QB60



- Brass Insert on Pump Head
- Brass Impeller
- Stainless Shaft

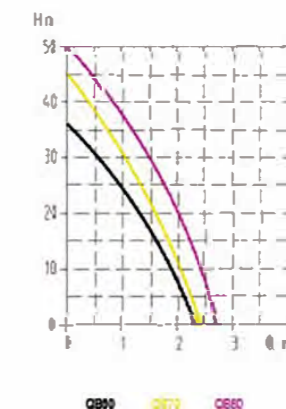

CE RoHS CB BSCI

**QB60 / QB70 / QB80**


W	V/Hz	H max m	Q max l/h	S max m	mm	m	Stator mm
0.5HP	230V/50HZ	36	2300	8	1"	H05 0.75x1.5m	L=55
0.75HP	230V/50HZ	45	2400	8	1"	H05 0.75x1.5m	L=60
1HP	230V/50HZ	50	2700	8	1"	H05 1.0x1.5m	L=70

Max Temperature of Liquid: 35°C 110V/60Hz is also available



QB60 Auto

- Brass Insert on Pump Head
- Brass Impeller
- Stainless Shaft
- 24L Pressure Tank

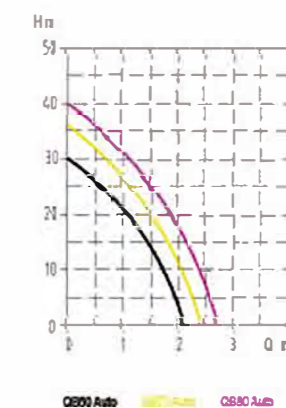

CE RoHS CB BSCI

**QB60 Auto / QB70 Auto / QB80 Auto**

W	V/Hz	H max m	Q max l/h	S max m	mm	m	Stator mm
0.5HP	230V/50HZ	30	2100	8	1"	H05 0.75x1.5m	L=55
0.75HP	230V/50HZ	36	2400	8	1"	H05 0.75x1.5m	L=60
1HP	230V/50HZ	40	2700	8	1"	H05 1.0x1.2m	L=70

Max Temperature of Liquid: 35°C 110V/60Hz is also available

# DIESEL TRANSFER PUMP




YBxxT



Brass Connectors

- MOTOR / PUMP UNIT
- BRASS CHECK VALVE
- OUTLET PRESSURE HOSE
- AUTO SHUT OFF NOZZLE
- HOSE CONNECTION / HOSE CLAMPS

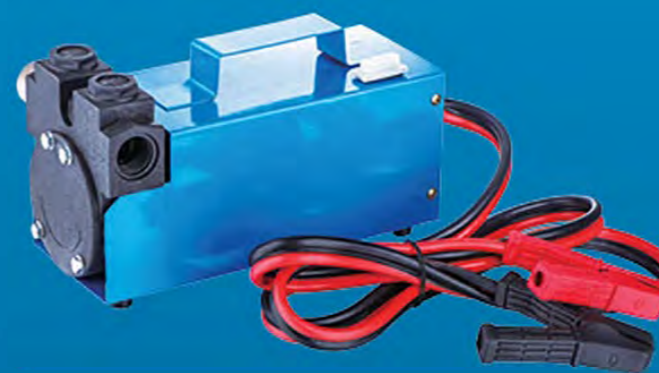

YB1224



Outlet Hose



YBxx



YB1224J

CE RoHS CB BSCI

## YBxxT / YBxx

W	V/Hz	H max m	Q max l/h	mm	m	a x b x h cm	cm <sup>3</sup> /pcs	pcs/20°C TN
400W	230V/50HZ	30	2150	1"	H07RN 1.0 <sup>2</sup> mmx1.2	46x27x46	47x28x47	380
		35	2300	1"	H07RN 1.0 <sup>2</sup> mmx1.2	46x27x46	47x28x47	380

Max Temperature of Liquid: 35°C 110V/60Hz is also available

CE RoHS CB BSCI

## YB1224 / YB1224J

W	V/Hz	I max A	Q max l/min	mm	m	a x b x h cm	m <sup>2</sup> pcs	pcs/20°C TN
180W	12V	15	40	3/4"	1.5	29x19x19	61x31x20	2070
400W	24V	17	60	3/4"	1.5	30x19.5x19.5	62x32x21	2070



# ACCESSORIES



YB1224JB



YB1224B

## Garden Water Filter



FL-1



FL-2



FE-1



Filter Handle

## Mechanical Pressure Switch



MCS-01



MCS-02



5 Way



3 Way

CE RoHS CB BSCI

YB1224JB / YB1224B

W	V/Hz	A	Q max l/min	mm	m	a x b x h cm	m/2pcs	pcs/20'CTN
180W	12V	15	40	3/4"	1.5	29x19x19	73x37.5x29	2070
400W	24V	17	60	3/4"	1.5	30x19.5x19.5	73x37.5x29	2070



### Float Switch



FS-01



FS-02



FS-03



FS-04



FS-05



FS-06



FS-07

### Garden Hose



GH01  
PVC with Steel  
Wire Tube



GH02  
PVC with Steel  
Wire Tube



GH03  
PVC Corrugated Tube  
in Black Color



GH04  
PVC Corrugated Tube  
in White Color



GH05  
Flat Tube

### Pressure Tank



Steel  
19L 24L 50L



Stainless  
19L 24L 50L

### Oil Dispensing Gun



FQ-01  
- Automatic  
- Aluminum Body



FQ-02  
- Manual  
- Plastic Body



FQ-03  
- Semi Automatic  
- Aluminum Body



Explosion Proof Material

Connectors



Connectors

