



## Submersible Grinder Pumps


---

Made in Taiwan



Catalogo 50 Hz

### Model code

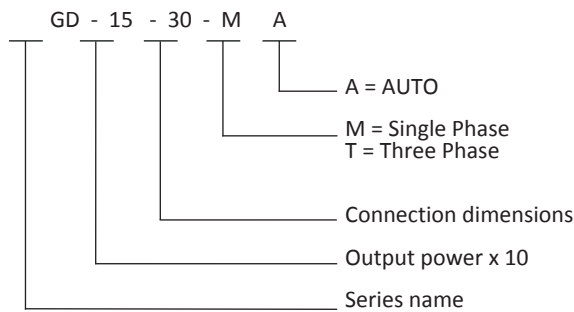

### Application

- Waste water treatment
- Sewage water
- Drainage of wastewater from individual residences, apartment buildings, recreational developments, motels
- Transferring wastewater, Schools, federal, state and local parks
- To transfer various wastewater and sewage

### Motor

- Motor Type: 2 POLE, dry type
- Frequency: 50Hz
- Insulation Class: E class (120°C)
- Nominal Speed: 2850 rpm


### Pump

- Enclosure Protection Class: IP 68
- Protector: Thermal protection
- Insulation Class: E class (120°C)
- Bearing: Ball Type
- Mechanical seal: Dual. Mechanical Seal

### Features


- Robust construction
- Superior Heat Dissipation
- Vortex impeller design prevents clogging by cutting up
- Robust cutter and cutter ring SUS440C : corrosion resistant material, hardened to 55-60 Rockwell C
- Specific single phase design for starting torque, torque is five times stronger than General capacitor pump
- Horizontal casing with female thread can be fit the pipe directly
- Double mechanical seals Upper:CA/CE/NBR  
Lower:SIC/SIC/NBR

### Performance Curves

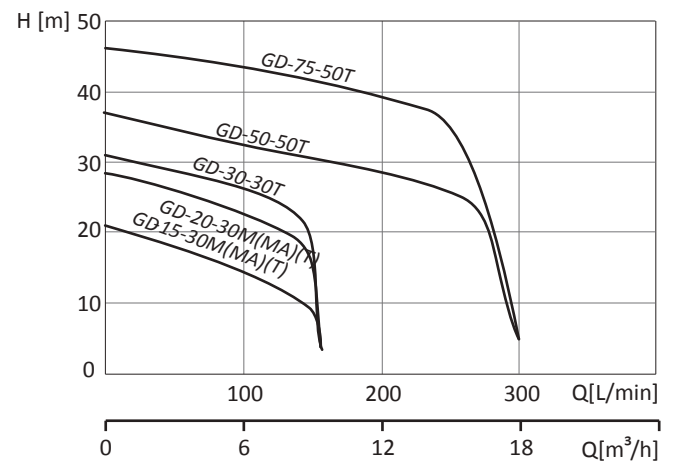


### Operating Conditions

- Liquid Temperature: 0°C - 40°C (32-104°F)
- MAX.depth: 10M

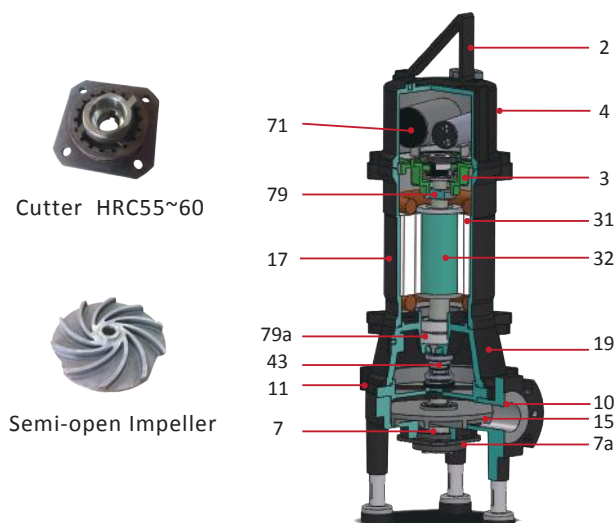

No.	Component	Material	
		1.5HP/2HP/3HP	5HP/7.5HP
2	Handle	SS 41	SS 41
3	Bracket	FC 200	FC 200
4	Upper Cover	FC 200	FC 200
7	Cutter	SUS 440C	SUS 440C
7a	Cutter Ring	SUS 440C	SUS 440C
10	Pump Casing	FC 200	FC 200
11	Seal Housing	FC 200	FC 200
15	Impeller	FC 200	FC 200
17	Motor Housing	FC 200	FC 200
19	Oil Chamber	FC 200	FC 200
31	Stator		
32	Shaft and Rotor	SUS 410	SUS 410
43	Mech. Seal	Upper:CA/CE/NBR Lower:SIC/SIC/NBR	Upper:CA/CE/NBR Lower:SIC/SIC/NBR
71	Capacitor	-	-
79	Upper Bearing	6203	6304
79a	Lower Bearing	6304	6305

### Dimensions

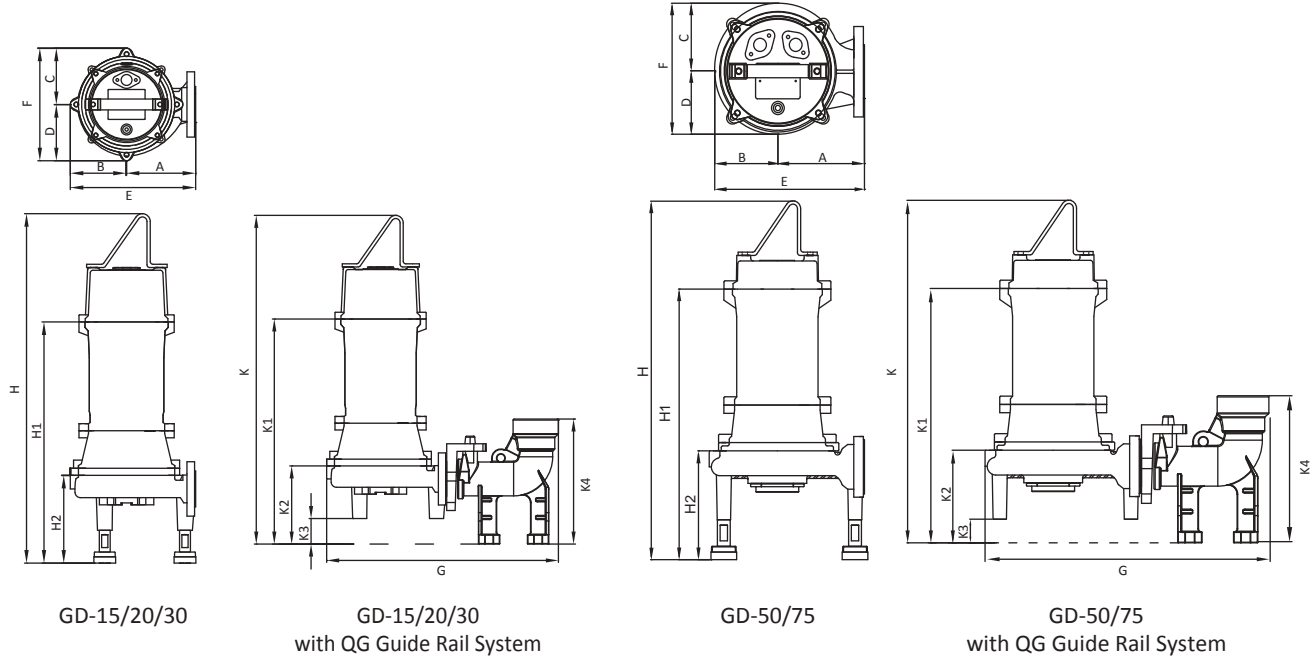

Model	Dimensions (mm)														
	A	B	C	D	E	F	G	H	H1	H2	K	K1	K2	K3	K4
GD-15-30	128	102	103	103	230	206	445	640	445	160	630	432	150	50	240
GD-20-30	128	102	103	103	230	206	445	640	445	160	630	432	150	50	240
GD-30-30	128	102	103	103	230	206	445	680	485	160	670	472	150	50	240
GD-50-50	164	119	125	114	283	239	500	669	509	186	637	477	154	29	240
GD-75-50	164	119	125	114	283	239	500	709	549	186	677	517	154	29	240

### Specifications

Model	Phase	Voltage (V)	Power		Head (Pressure)		Flow (Capacity)		Connection	Cable	Weight
			HP	KW	Rated (M)	Max. (M)	Rated(L/min)	Max. (L/min)			
GD-15-30M	1 $\phi$	220~240	1.5	1.1	18	21	60	160	1-1/4"	10	30
GD-15-30MA		220~240	1.5	1.1	18	21	60	160	1-1/4"	10	30.5
GD-20-30M		220~240	2	1.5	22	28.5	100	160	1-1/4"	10	32.8
GD-20-30MA		220~240	2	1.5	22	28.5	100	160	1-1/4"	10	33.3
GD-15-30T	3 $\phi$	380~415	1.5	1.1	18	21	60	160	1-1/4"	10	30
GD-20-30T		380~415	2	1.5	22	28.5	100	160	1-1/4"	10	32.8
GD-30-30T		380~415	3	2.2	24	31	120	160	1-1/4"	10	35
GD-50-50T		380~415	5	3.7	25	37	250	300	2"	10	44
GD-75-50T		380~415	7.5	5.5	35	46	250	300	2"	10	49

- Model with "M" is single.
- Model with "T" is three.
- Model with "A" is AUTO.