





Pressure Tanks with Diaphragm Membrane

Made in Taiwan

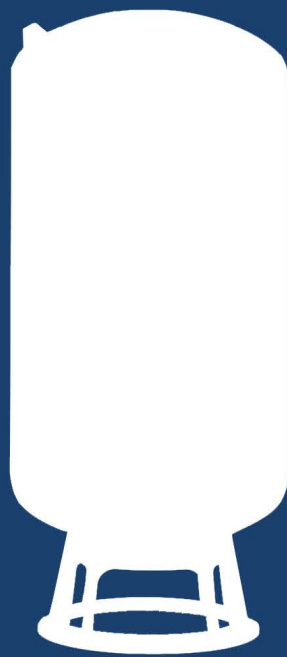

Catalogo

Model code

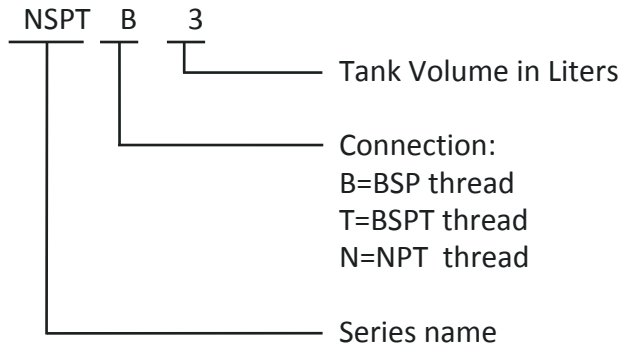

Features

- Polypropylene liner to ensure long durability
- EPDM diaphragm to assure long life and safety
- Corrosion resistant durable baked epoxy coating finish
- Leak free, O-ring sealed air valve cap
- 100% pressure tested
- No maintenance needed
- 304 Stainless Steel water connection

Applications

- Water storage
- Water pressure boosting
- Water transferring



In-Line Type





Vertical Type With Base

Operation Conditions

- Max.Working Pressure: 10 bar
- Max.Working Temperature: 90°C


Volume	Type
1 - 38 Liter	In-Line
58 - 305 Liter	Vertical Type With Base

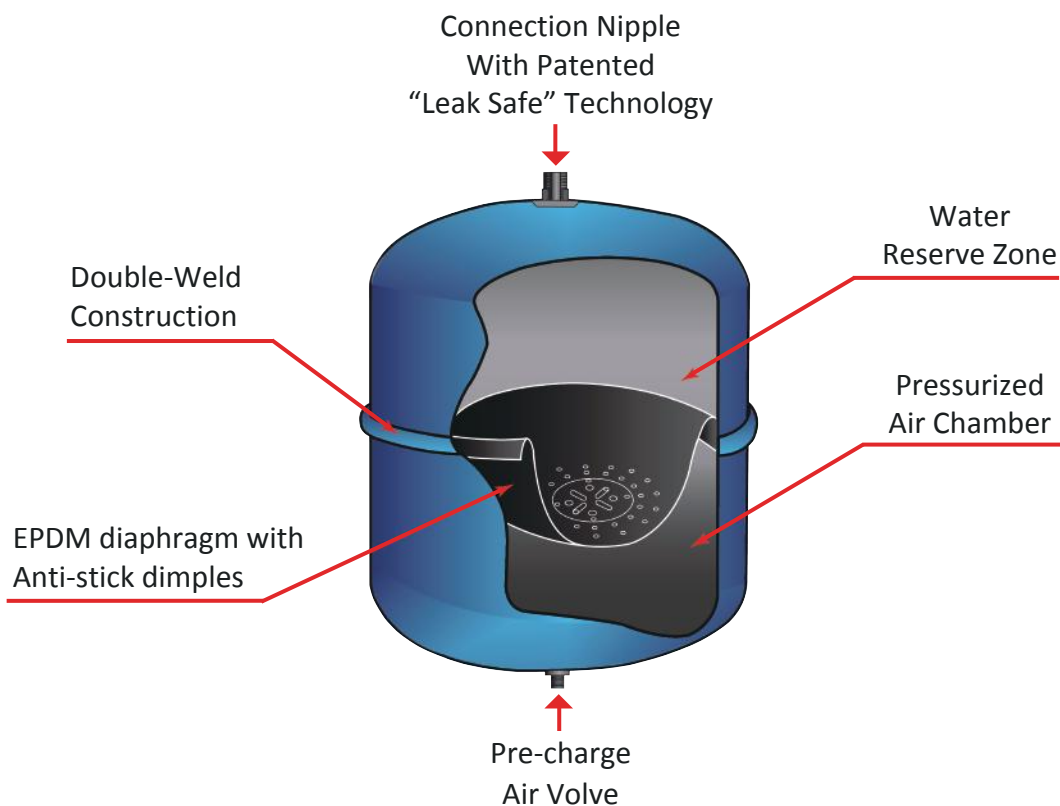

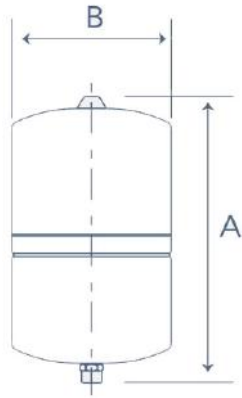

In-line Type

Model	Dimensions(mm)		
	A	B	C
In-line Type			
NSPT 1	200	120	-
NSPT 3	215	130	-
NSPT 8	290	203	-
NSPT 12	390	230	-
NSPT 18	390	280	-
NSPT 24	415	295	-
NSPT 38	550	295	-

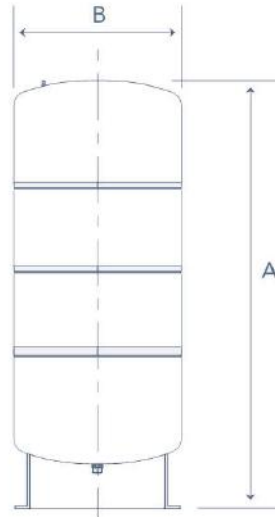

Vertical Type With Base

Model	Dimensions(mm)		
	A	B	C
Vertical Type With Base			
NSPT 58	620	381	-
NSPT 80	740	381	-
NSPT 100	985	381	-
NSPT 130	750	559	-
NSPT 160	915	559	-
NSPT 235	1160	559	-
NSPT 305	1450	559	-

Model			Total Tank Volume		Accept Volume		N.W.		G.W		Shipping Volume	Connection	Base
			Liter	Gal	Liter	Gal	Kg	Lbs.	Kg	Lbs.	CBM	Dimensions	Material
BSP	BSPT	NPT	1	0.3	0.3	0.08	0.6	1.3	0.7	1.5	0.0042	1/2" (MALE)	-
N/A	N/A	NSPTN 1	3	0.5	1.0	0.25	1.1	2.4	1.2	2.6	0.0059	3/4" or 1" (MALE)	-
NSPTB 3	NSPTT 3	NSPTN 3	8	2.0	3.5	0.9	1.9	4.2	2.1	4.7	0.0147	3/4" or 1" (MALE)	-
NSPTB 8	NSPTT 8	NSPTN 8	12	3.2	6.0	1.6	2.8	6.2	3.0	6.7	0.0212	3/4" or 1" (MALE)	-
NSPTB 12	NSPTT 12	NSPTN 12	18	4.5	9.5	2.5	3.5	7.7	3.7	8.2	0.0319	3/4" or 1" (MALE)	-
NSPTB 18	NSPTT 18	NSPTN 18	24	6.0	11.5	3.0	4.2	9.2	4.6	10.1	0.0387	3/4" or 1" (MALE)	-
NSPTB 24	NSPTT 24	NSPTN 24	38	10	20.0	5.2	6.0	13.2	6.4	14.0	0.0512	3/4" or 1" (MALE)	-
NSPTB 38	NSPTT 38	NSPTN 38	Vertical Type With Base										
NSPTB 58	NSPTT 58	NSPTN 58	58	14	42.8	11.3	9.0	19.8	9.7	21.4	0.1076	3/4" or 1" (MALE)	PLASTIC
NSPTB 80	NSPTT 80	NSPTN 80	80	20	50.0	13.0	12.2	26.8	13.0	28.6	0.1330	3/4" or 1" (MALE)	PLASTIC
NSPTB 100	NSPTT 100	NSPTN 100	100	28	58.5	15.0	15.0	33.0	15.5	34.1	0.1698	1"(MALE)	PLASTIC
NSPTB 130	NSPTT 130	NSPTN 130	130	34	85.6	22.5	20.8	45.8	22.0	48.4	0.2384	1-1/4"(MALE)	STEEL
NSPTB 160	NSPTT 160	NSPTN 160	160	44	115	30.0	24.1	53.2	26.8	59.1	0.2888	1-1/4"(MALE)	STEEL
NSPTB 235	NSPTT 235	NSPTN 235	235	62	140	35.2	34.9	76.8	36.5	80.3	0.3709	1-1/4"(MALE)	STEEL
NSPTB 305	NSPTT 305	NSPTN 305	305	81	167	44.0	44.8	98.6	46.8	103	0.4615	1-1/4"(MALE)	STEEL

- NSPT 1 and 3 liters tanks:12 pcs / box
- Optional Stainless steel 90°female elbow (58, 80, 100, 130, 160, 235, 305 Liters vertical models)
- Factory Precharge:30 PSI / 2bar