




Vertical Multistage
Centrifugal In-Line Pumps

Made in Taiwan



Catalogo 50 Hz.

SB, SBI, SBN Series Performance range 50 Hz

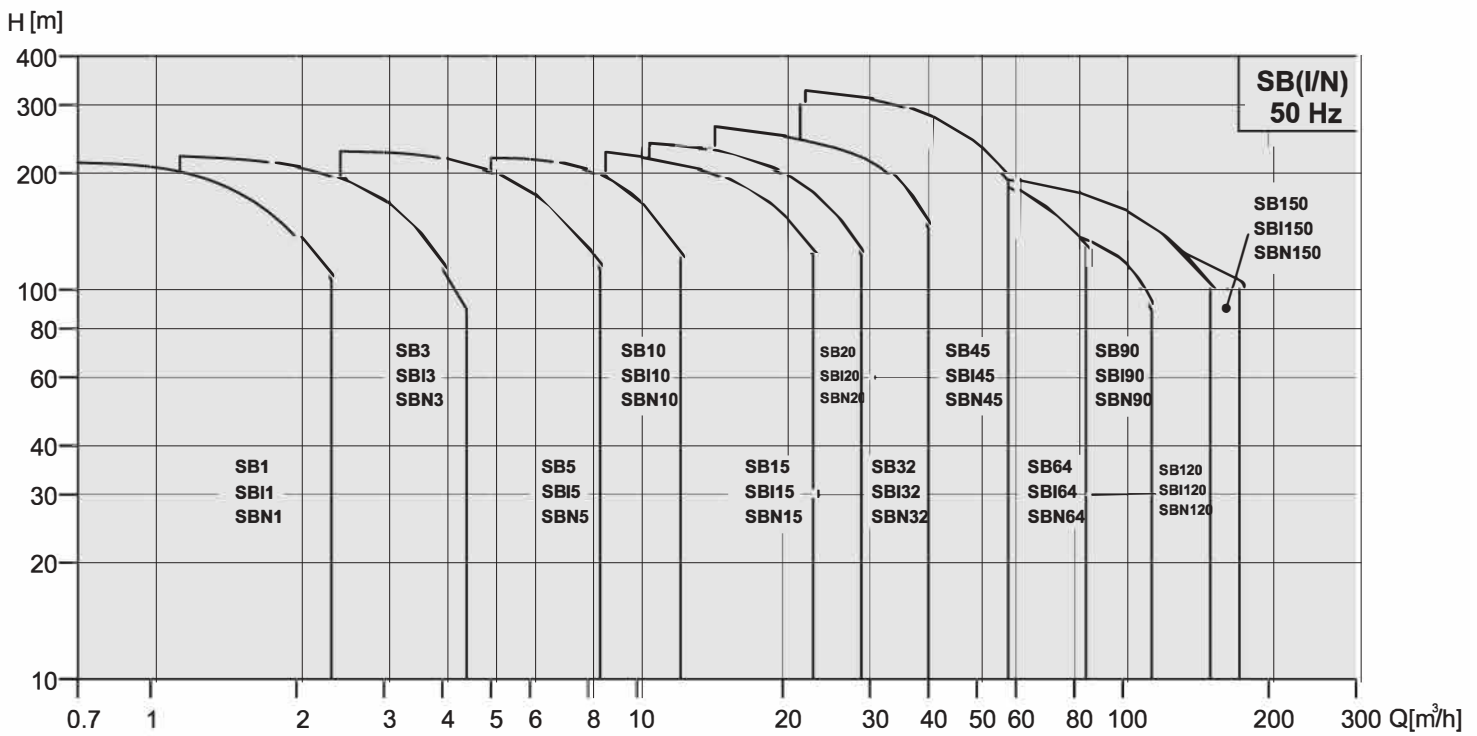

Pump



The SB, SBI and SBN pumps are non-self priming vertical multistage pump of in-line design, flange or with Victaulic coupling with equally sized suction and discharge ports. Stage construction with stainless steel impellers, chambers and pressure casing. Pump stub shaft and motor shaft of the IEC-standards motor are directly close coupled. All pumps are equipped with a cartridge type mechanical seal for easy maintenance.

SB, SBI and SBN pumps have different pump sizes and various numbers of stages to provide the flow and the pressure required.

Applications

WATER SUPPLY AND PRESSURE BOOSTING Pressure

boosting in buildings, hotels, residential complexes Pressure booster stations, supply of water networks Pressure boosting for industrial water supply

IRRIGATION AND AGRICULTURE

Greenhouses
Sprinkler irrigation
Field irrigation (flooding)

LIGHT INDUSTRY

Washing and cleaning systems
Car washing facilities
Fire fighting systems
Process water systems
Machine tools (cooling lubricants)

WATER TREATMENT


Water softeners and de-mineralization
Reverse Osmosis systems
Distillation systems
Filtration
Ultra-filtration systems

HEATING, VENTILATION AND AIR-CONDITIONING Boilers


Induction heating
Heat exchangers
Refrigerators
Cooling towers and systems
Temperature control systems

Identification Code

SB - 10 - 5 - S Q Q E

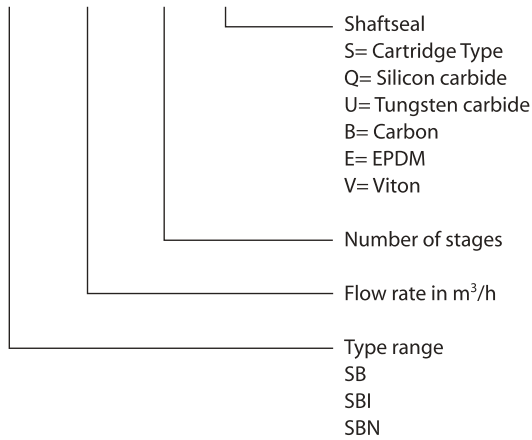

Pump nameplate information

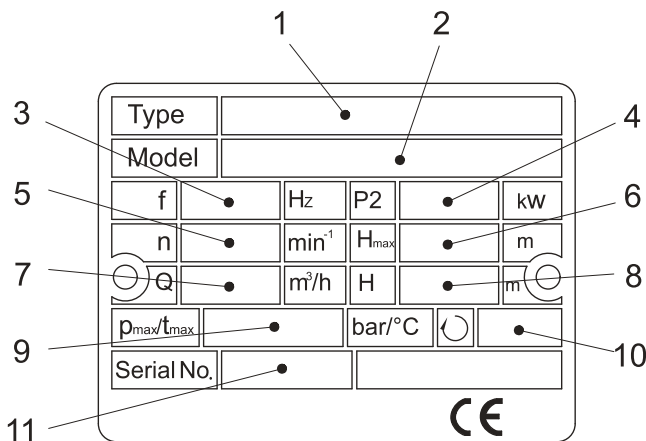

1. Pump Type - Seal Type

2. Pump Model

3. Frequency

4. Rated Power

5. Speed

6. Maximum Head

7. Capacity

8. Head Range

9. Maximum Operating Pressure

10. Rotating Direction

11. Serial number

Motor

- Squirrel cage in short circuit, aluminum casing up to 22 kW, totally enclosed, fan-cooled, 2-pole standard motor.

- Standard supply Stairs motors up to 15 kW. Other motor brands for higher powers.

- Electrical data

- Enclosure class: IP55

- Insulation class: F

- Standard voltages: P2: 0.37-7.5 KW: 3 x 220-240/380-415 V

P2: From 11 KW 3 x 380-415 V

- The motors have efficiency values that fall within the range normally referred to as high efficiency.

- Ambient temperature: Max. +50°C

Motor Data

Motor Type				Nominal current in [A]					
HP	kW	Pole	Flange	Frame	3-220V	3-240V	3-380V	3-415V	
0.5	0.37	2	B14	71A	1.7	1.9	1.0	1.1	
0.75	0.55			71B	2.6	2.9	1.5	1.7	
1.0	0.75			80A	3.4	3.4	2.0	2.0	
1.5	1.1			80B	4.8	5.0	2.8	2.9	
2.0	1.5			90S	6.1	6.2	3.5	3.6	
3.0	2.2			90L	9.7	11.1	5.6	6.4	
4.0	3.0			100L	11.9	12.1	6.9	7.0	
5.5	4.0			112M	15.1	15.2	8.7	8.8	
7.5	5.5			B5	132S	18.7	18.0	10.8	10.4
10	7.5				132S	25.5	24.9	14.7	14.4
			B14			3-380V	3-41 SV	3-660V	3-720V
4.0	3.0			100L	6.8	6.9	3.9	4.0	
5.5	4.0			112M	8.7 10.9	8.3 10.8	5.0	4.8	
7.5	5.5			132S	14.9 22.2	14.8 20.9	6.3	6.2	
10	7.5			132S	30.2	28.4	8.6 12.8	8.5 12.1	
15	11			160L			17.4	16.4	
20	15			160L					
							3-380V	3-660V	
15	11			B5	160M			21.0 28.4	12.1 16.3
20	15				160M			34.7 41.1	20.0 23.7
25	18.5	160L				55.7 68.3	32.1 39.3		
30	22	180M				82.7	47.6 58.0		
40	30	200L				100.7	78.6		
50	37	200L				136.5			
60	45	225M							
75	55	250M							
100	75	280S							

Mechanical Seal Standard

Standard Cartridge type mechanical seal made of Silicon Carbide/Silicon Carbide/EPDM or Viton. Based on the type of application, alternative materials are available for the seal and the elastomers. The cartridge type mechanical seal can be replaced in minutes without special tools and without dismantling the pump.



List of Materials

Q : Silicon carbide	E : EPDM
U : Tungsten carbide	V : Viton
B : Carbon	

Type of Seal

Seal Type	SB/SBI/SBN		
	1/3/5/10/15/20 /32/45/64/90	120/150	
		0.5-60HP	75-100HP
Mechanical Seals			
S: O-ring seal Cartridge type	●	●	
B: Rubber bellows seal Cartridge type			●
QQ	●	●	●
UU	Optional	Optional	
QB	Optional	Optional	
UB	Optional	Optional	
Seals			
E	●	●	●
V	●	●	●


Maximum operating and inlet pressures

50Hz

Stages	Maximum Operating Pressure	Stages	Maximum Inlet Pressures
SB, SBI, SBN 1			
2-36	25bar	2-36	10bar
SB, SBI, SBN 3			
2-36	25bar	2-29	10bar
		31-36	15bar
SB, SBI, SBN 5			
2-36	25bar	2-16	10bar
		18-36	15bar
SB, SBI, SBN 10			
1-16	16bar	1-6	8bar
17-22	25bar	7-22	10bar
SB, SBI, SBN 15			
1-10	16bar	1-3	8bar
12-17	25bar	4-17	10bar
SB, SBI, SBN 20			
1-10	16bar	1-3	8bar
12-17	25bar	4-17	10bar
SB, SBI, SBN 32			
(1-1)-7	16bar	(1-1)-4	4bar
(8-2)-14	30bar	(5-2)-10	10bar
		(11-2)-14	15bar
SB, SBI, SBN 45			
(1-1)-5	16bar	(1-1)-2	4bar
(6-2)-11	30bar	(3-2)-5	10bar
(12-2)-(13-2)	33bar	(6-2)-(13-2)	15bar
SB, SBI, SBN 64			
(1-1)-5	16bar	(1-1)-(2-2)	4bar
(6-2)-(8-1)	30bar	(2-1)-(4-2)	10bar
		(4-1)-(8-1)	15bar
SB, SBI, SBN 90			
(1-1) - 4	16bar	(1-1) - 1	4bar
(5-2) - 6	30bar	(2-1) - (3-2)	10bar
		3 - 6	15bar
SB, SBI, SBN 120			
1-7	30bar	1-(2-1)	10bar
		2-(5-1)	15bar
		(6-1)-7	20bar
SB, SBI, SBN 150			
(1-1)-6	30bar	(1-1)-1	10bar
		(2-1)-(4-2)	15bar
		(5-2)-6	20bar


* Rule to follow : The inlet pressure+ the pressure against a closed valve < Max. Operating pressure.

Dimensions and weights

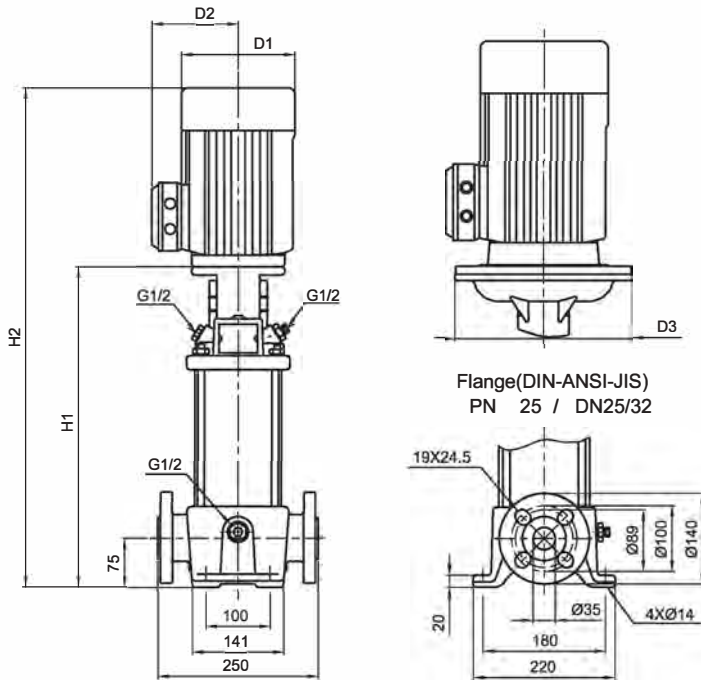


Pump type	Motor	SB					Net weight [kg]
		Dimension[mm]					
	P2 [kW]	DIN flange		D1	D2	D3	DIN flange
H1	H2						
SB 5-2	0.37	279	474	141	115	-	23.3
SB 5-3	0.55	306	501	141	115	-	24.2
SB 5-4	0.55	333	528	141	115	-	24.8
SB 5-5	0.75	366	601	141	115	-	27.4
SB 5-6	1.1	393	628	141	115	-	29.1
SB 5-7	1.1	420	655	141	115	-	29.6
SB 5-8	1.1	447	682	141	115	-	30.1
SB 5-9	1.5	490	781	177	141	-	39.3
SB 5-10	1.5	517	808	177	141	-	39.9
SB 5-11	2.2	544	835	177	141	-	43.2
SB 5-12	2.2	571	862	177	141	-	43.7
SB 5-13	2.2	598	889	177	141	-	44.2
SB 5-14	2.2	625	916	177	141	-	44.8
SB 5-15	2.2	652	943	177	141	-	45.2
SB 5-16	2.2	679	970	177	141	-	45.8
SB 5-18	3	737	1053	197	147	-	54.3
SB 5-20	3	791	1107	197	147	-	55.5
SB 5-22	4	845	1171	220	161	-	59.8
SB 5-24	4	899	1225	220	161	-	60.8
SB 5-26	4	953	1279	220	161	-	62.7
SB 5-29	4	1034	1360	220	161	-	64.6
SB 5-32	5.5	1145	1507	235	197	300	90.1
SB 5-36	5.5	1253	1615	235	197	300	92.6

Dimensions and weights

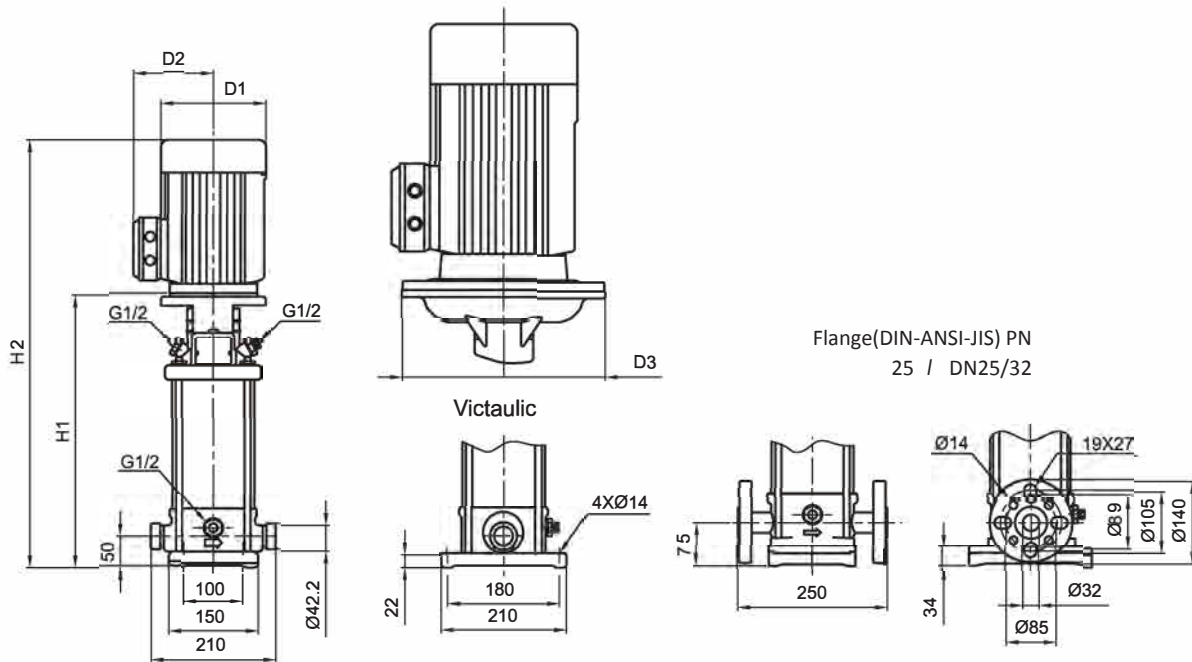


Pump type	Motor	SBI, SBN								
		Dimension [mm]							Net weight [kg]	
	P2 [kW]	Victaulic		DIN flange H1		D1	D2	D3	Victaulic	DIN flange
		H1	H2	H2						
SBI,SBN5-2	0.37	257	452	282	477	141	115	-	19.2	20.1
SBI,SBN5-3	0.55	284	479	309	504	141	115	-	20.3	21.2
SBI,SBN5-4	0.55	311	506	336	531	141	115	-	20.8	21.8
SBI,SBN5-5	0.75	344	579	369	604	141	115	-	23.4	24.3
SBI,SBN5-6	1.1	371	606	396	631	141	115	-	25.1	26.0
SBI,SBN5-7	1.1	398	633	423	658	141	115	-	25.6	26.5
SBI,SBN5-8	1.1	425	660	450	685	141	115	-	26.1	27.1
SBI,SBN5-9	1.5	468	759	493	784	177	141	-	35.4	36.4
SBI,SBN5-10	1.5	495	786	520	811	177	141	-	36.0	36.9
SBI,SBN5-11	2.2	522	813	547	838	177	141	-	39.3	40.3
SBI,SBN5-12	2.2	549	840	574	865	177	141	-	39.9	40.8
SBI,SBN5-13	2.2	576	867	601	892	177	141	-	40.4	41.4
SBI,SBN5-14	2.2	603	894	628	919	177	141	-	41.0	41.9
SBI,SBN5-15	2.2	630	921	655	946	177	141	-	41.5	42.5
SBI,SBN5-16	2.2	657	948	682	973	177	141	-	42.1	43.0
SBI,SBN5-18	3	715	1031	740	1056	197	147	-	50.3	51.3
SBI,SBN5-20	3	769	1085	794	1110	197	147	-	51.6	52.5
SBI,SBN5-22	4	823	1149	848	1174	220	161	-	55.8	56.8
SBI,SBN5-24	4	877	1203	902	1228	220	161	-	56.9	57.8
SBI,SBN5-26	4	931	1257	956	1282	220	161	-	58.0	58.9
SBI,SBN5-29	4	1012	1338	1037	1363	220	161	-	59.7	60.6
SBI,SBN5-32	5.5	1123	1485	1148	1510	235	197	300	84.9	85.8
SBI,SBN5-36	5.5	1231	1593	1256	1618	235	197	300	87.1	88.1

Dimensions and weights

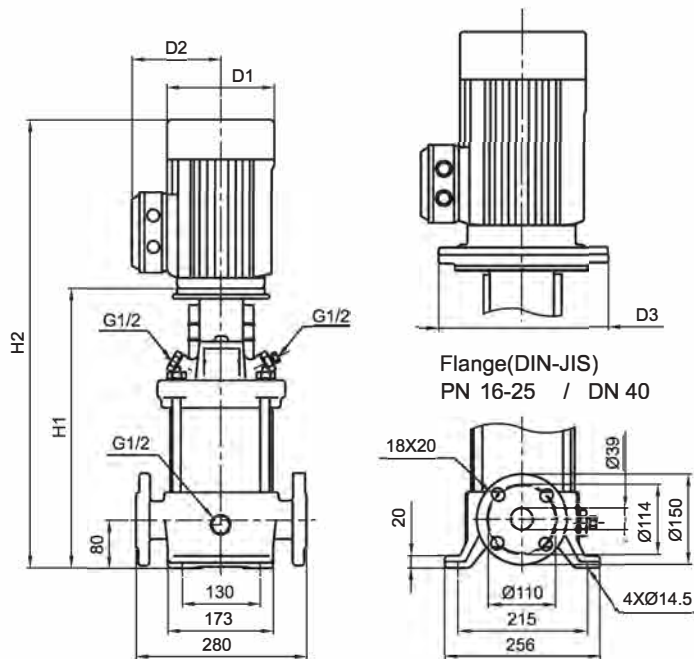


Pump type	Motor	SB					
		Dimension[mm]					Net weight [kg]
		DIN flange		D1	D2	D3	
		P2 [kW]	H1				H2
SB10-1	0.37	343	538	141	115	-	35.9
SB10-2	0.75	347	582	141	115	-	38.2
SB10-3	1.1	377	612	141	115	-	40.3
SB10-4	1.5	423	714	177	141	-	50.1
SB10-5	2.2	453	744	177	141	-	53.9
SB10-6	2.2	483	774	177	141	-	55.0
SB10-7	3	518	834	197	147	-	63.8
SB10-8	3	548	864	197	147	-	64.9
SB10-9	3	578	894	197	147	-	65.9
SB10-10	4	608	934	220	161	-	70.3
SB10-12	4	668	994	220	161	-	72.4
SB10-14	5.5	760	1122	235	197	300	104.1
SB10-16	5.5	820	1182	235	197	300	106.2
SB10-18	7.5	880	1278	235	197	300	113.6
SB10-20	7.5	940	1338	235	197	300	116.7
SB10-22	7.5	1000	1398	235	197	300	118.8

Dimensions and weights

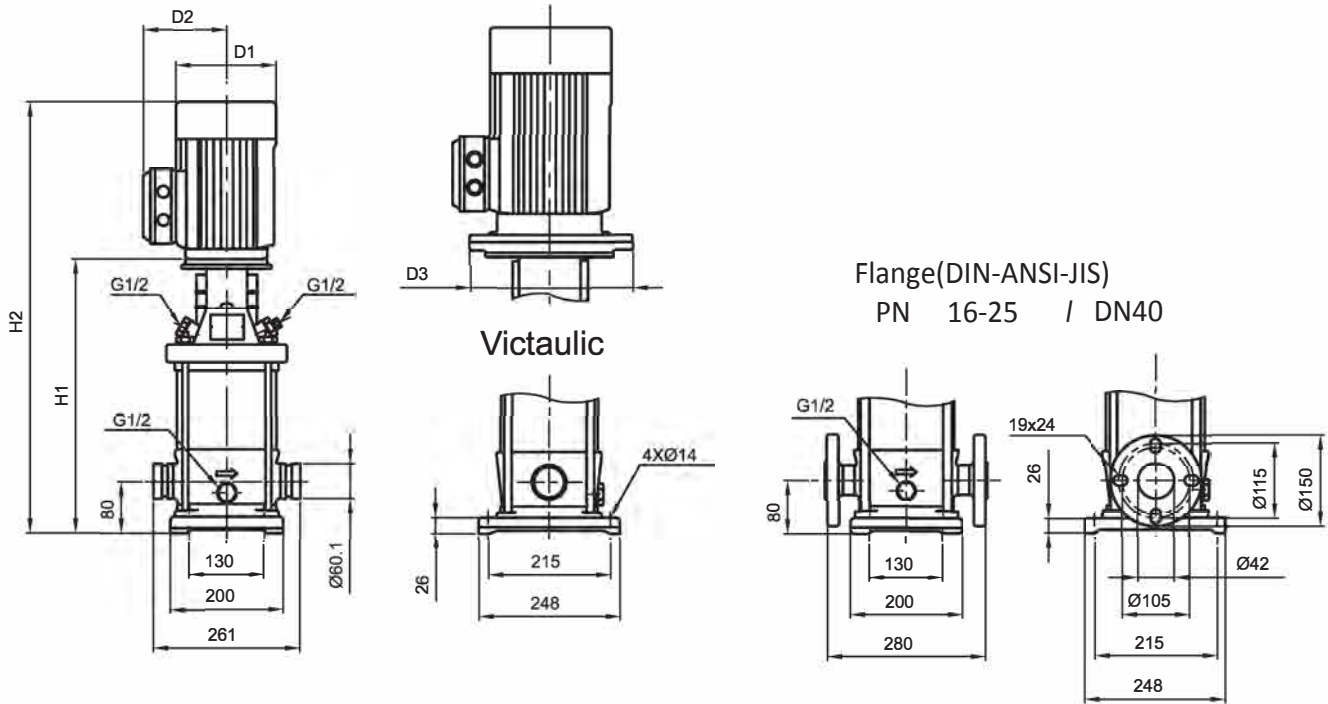


Pump type	Motor P2 [kW]	SBI, SBN								
		Dimension [mm]						Net weight [kg]		
		Victaulic		DIN flange H1		D1	D2	D3	Victaulic	DIN flange
		H1	H2	H2						
SBI,SBN10-1	0.37	353	548	353	548	141	115	-	31.6	31.4
SBI,SBN10-2	0.75	357	592	357	592	141	115	-	34.3	34.2
SBI,SBN10-3	1.1	387	622	387	622	141	115	-	36.4	36.3
SBI,SBN10-4	1.5	433	724	433	724	177	141	-	46.1	46.0
SBI,SBN10-5	2.2	463	754	463	754	177	141	-	50.0	49.8
SBI,SBN10-6	2.2	493	784	493	784	177	141	-	51.0	50.8
SBI,SBN10-7	3	528	844	528	844	197	147	-	59.1	58.9
SBI,SBN10-8	3	558	874	558	874	197	147	-	60.1	60.0
SBI,SBN10-9	3	588	904	588	904	197	147	-	61.1	61.0
SBI,SBN10-10	4	618	944	618	944	220	161	-	65.6	65.4
SBI,SBN10-12	4	678	1004	678	1004	220	161	-	67.6	67.5
SBI,SBN10-14	5.5	770	1132	770	1132	235	197	300	100.4	100.3
SBI,SBN10-16	5.5	830	1192	830	1192	235	197	300	102.5	102.4
SBI,SBN10-18	7.5	890	1288	890	1288	235	197	300	110.9	110.8
SBI,SBN10-20	7.5	950	1348	950	1348	235	197	300	113.0	112.8
SBI,SBN10-22	7.5	1010	1408	1010	1408	235	197	300	115.1	114.9

Dimensions and weights

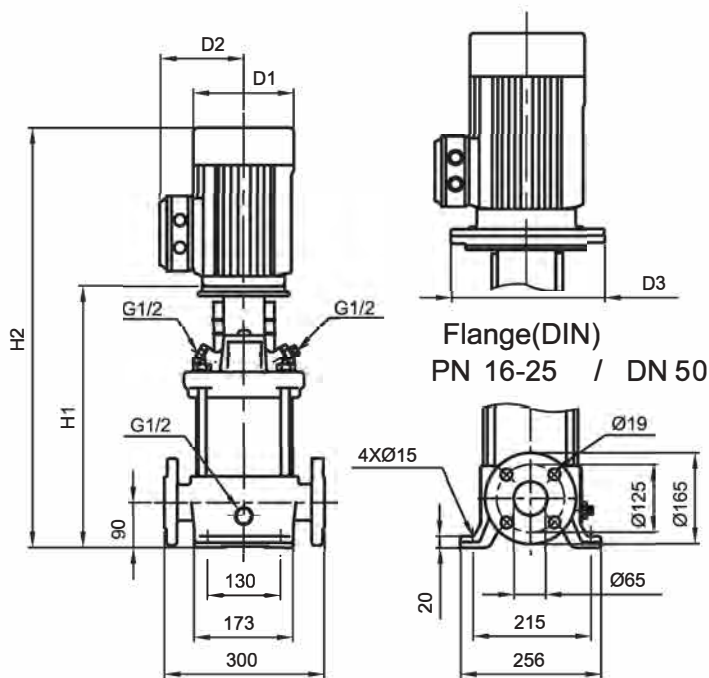


Pump type	Motor P2 [kW]	SB					Net weight [kg]
		Dimension[mm]					
		DIN flange		D1	D2	D3	DIN flange
		H1	H2				
SB 15-1	1.1	400	635	141	115	-	43.8
SB 15-2	2.2	415	706	177	141	-	55.7
SB 15-3	3	465	781	197	147	-	64.9
SB 15-4	4	510	836	220	161	-	69.7
SB 15-5	4	555	881	220	161	-	71.2
SB 15-6	5.5	632	994	235	197	300	102.3
SB 15-7	5.5	677	1039	235	197	300	103.8
SB 15-8	7.5	722	1120	235	197	300	111.8
SB 15-9	7.5	767	1165	235	197	300	113.3
SB 15-10	11	889	1394	318	245	350	151.0
SB 15-12	11	979	1484	318	245	350	154.0
SB 15-14	11	1069	1574	318	245	350	157.3
SB 15-17	15	1204	1714	318	245	350	172.4

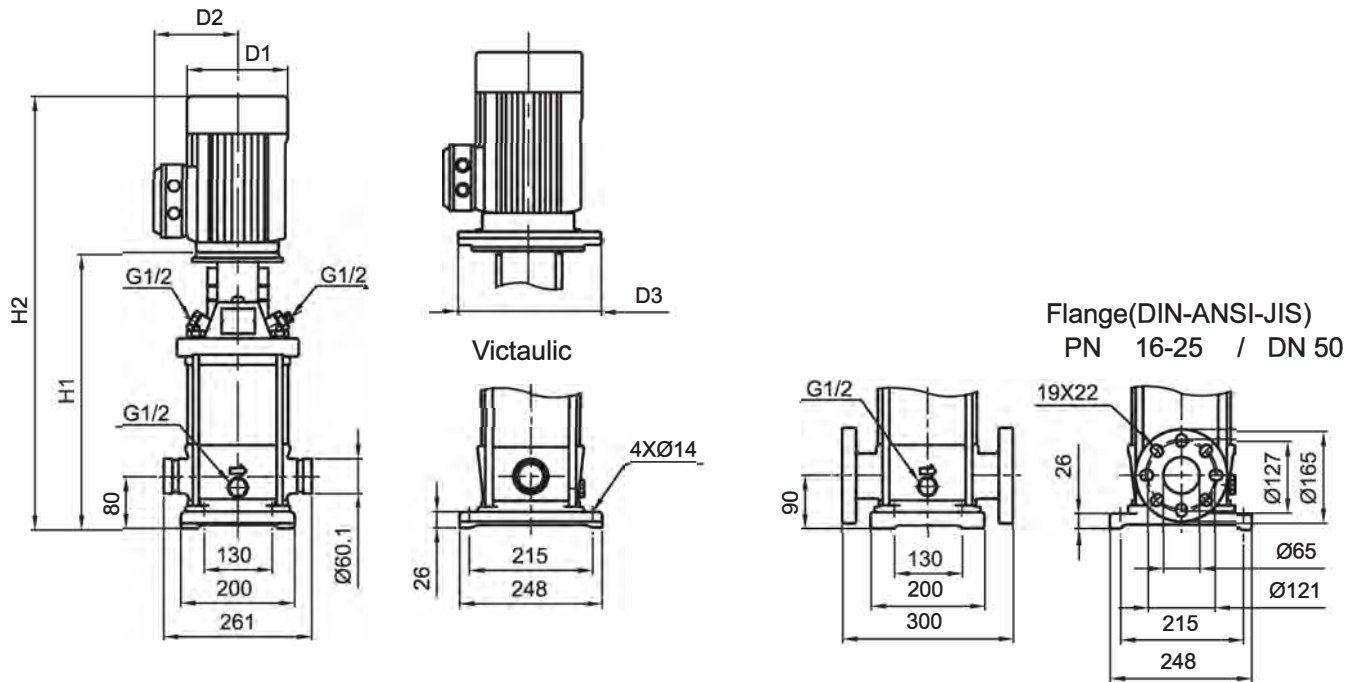
Dimensions and weights


Pump type	Motor P2 [kW]	SBI, SBN								
		Dimension [mm]							Net weight [kg]	
		Victaulic		DIN flange H1		D1	D2	D3	Victaulic	DIN flange
		H1	H2	H1	H2					
SBI,SBN15-1	1.1	387	622	397	632	141	115	-	36.0	36.6
SBI,SBN15-2	2.2	403	694	413	704	177	141	-	47.7	48.3
SBI,SBN15-3	3	453	769	463	779	197	147	-	56.1	56.7
SBI,SBN15-4	4	498	824	508	834	220	161	-	61.0	61.6
SBI,SBN15-5	4	543	869	553	879	220	161	-	62.4	63.0
SBI,SBN15-6	5.5	620	982	630	992	235	197	300	94.6	95.3
SBI,SBN15-7	5.5	665	1027	675	1037	235	197	300	96.1	96.7
SBI,SBN15-8	7.5	710	1108	720	1118	235	197	300	104.1	104.7
SBI,SBN15-9	7.5	755	1153	765	1163	235	197	300	105.6	106.2
SBI,SBN15-10	11	877	1382	887	1392	318	245	350	143.7	144.3
SBI,SBN15-12	11	967	1472	977	1482	318	245	350	146.5	147.2
SBI,SBN15-14	11	1057	1562	1067	1572	318	245	350	149.5	150.1
SBI,SBN15-17	15	1192	1702	1202	1712	318	245	350	163.8	164.4

Dimensions and weights

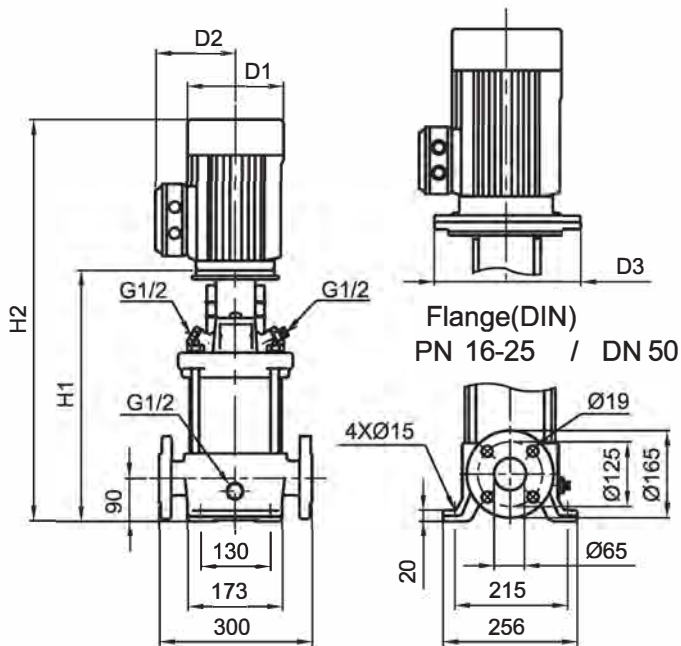


Pump type	Motor	SB					
		Dimension[mm]					Net weight [kg]
	P2 [kW]	DIN flange		D1	D2	D3	
		H1	H2				
SB 20-1	1.1	400	636	141	115	-	43.9
SB 20-2	2.2	415	708	177	141	-	55.7
SB 20-3	4	465	795	220	161	-	68.3
SB 20-4	5.5	542	910	235	197	300	99.4
SB 20-5	5.5	587	955	235	197	300	100.8
SB 20-6	7.5	632	1038	235	197	300	108.6
SB 20-7	7.5	677	1083	235	197	300	110.1
SB 20-8	11	799	1315	318	245	350	148.1
SB 20-10	11	889	1405	318	245	350	151.0
SB 20-12	15	979	1504	318	245	350	164.0
SB 20-14	15	1069	1594	318	245	350	166.9
SB 20-17	18.5	1204	1773	318	245	350	195.4

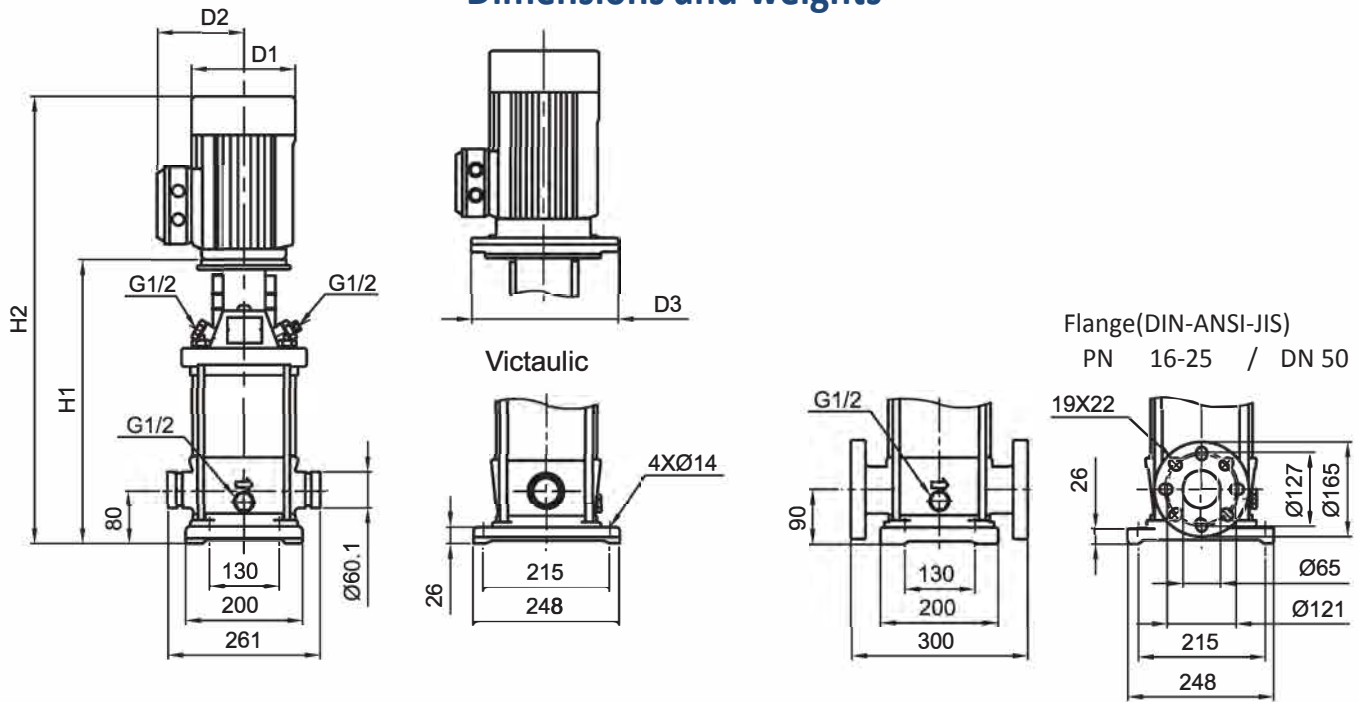Dimensions and weights


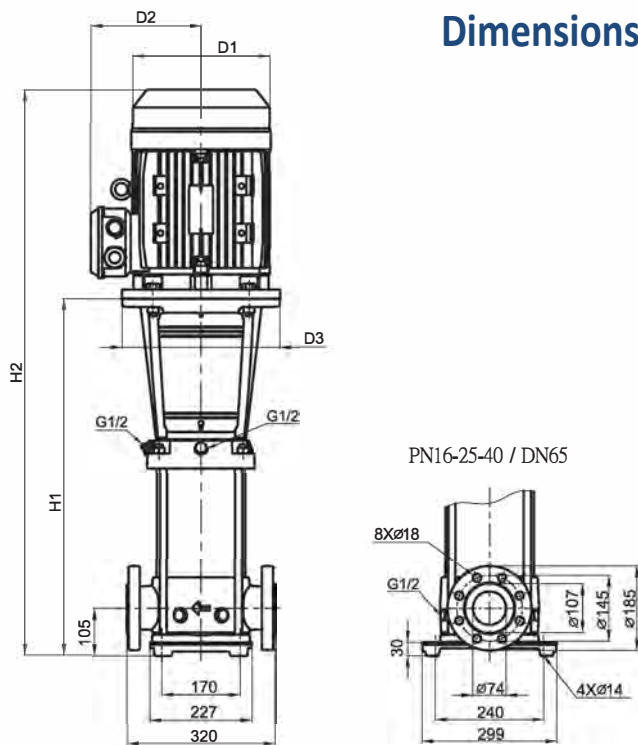
Pump type	Motor	SBI, SBN									
		Dimension [mm]							Net weight [kg]		
		P2 [kW]	Victaulic		DIN flange H1		D1	D2	D3	Victaulic	DIN flange
			H1	H2		H2					
SBI,SBN20-1	1.1	387	623	397	632	141	115	-	36.0	36.6	
SBI,SBN20-2	2.2	403	696	413	704	177	141	-	47.7	48.3	
SBI,SBN20-3	4	453	783	463	789	220	161	-	59.5	60.2	
SBI,SBN20-4	5.5	530	898	540	902	235	197	300	91.7	92.3	
SBI,SBN20-5	5.5	575	943	585	947	235	197	300	93.2	93.8	
SBI,SBN20-6	7.5	620	1026	630	1028	235	197	300	100.9	101.6	
SBI,SBN20-7	7.5	665	1071	675	1073	235	197	300	102.4	103.0	
SBI,SBN20-8	11	787	1303	797	1302	318	245	350	140.7	141.3	
SBI,SBN20-10	11	877	1393	887	1392	318	245	350	143.7	144.3	
SBI,SBN20-12	15	967	1492	977	1487	318	245	350	156.6	157.2	
SBI,SBN20-14	15	1057	1582	1067	1577	318	245	350	159.5	160.1	
SBI,SBN20-17	18.5	1192	1761	1202	1752	318	245	350	187.8	188.5	

Dimensions and weights

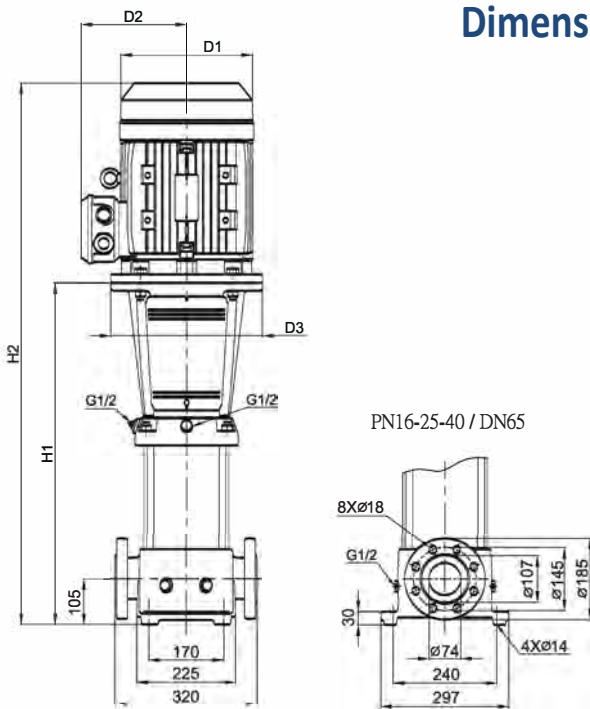


Pump type	Motor P2 [kW]	SB					Net weight [kg]
		Dimension[mm]			D1	D2	
		DIN flange		D1			D2
H1	H2						
SB32-1-1	1.5	504	795	177	141	280	71.5
SB32-1	2.2	504	795	177	141	280	74.3
SB32-2-2	3	574	935	197	147	280	84.2
SB32-2	4	574	900	220	161	280	87.6
SB32-3-2	5.5	644	1006	235	197	300	110.2
SB32-3	5.5	644	1006	235	197	300	110.2
SB32-4-2	7.5	714	1112	235	197	300	119.5
SB32-4	7.5	714	1112	235	197	300	119.5
SB32-5-2	11	894	1399	318	245	350	164.3
SB32-5	11	894	1399	318	245	350	164.3
SB32-6-2	11	964	1469	318	245	350	167.3
SB32-6	11	964	1469	318	245	350	167.3
SB32-7-2	15	1034	1544	318	245	350	180.4
SB32-7	15	1034	1544	318	245	350	180.4
SB32-8-2	15	1104	1614	318	245	350	183.5
SB32-8	15	1104	1614	318	245	350	183.5
SB32-9-2	18.5	1174	1724	318	245	350	210.6
SB32-9	18.5	1174	1724	318	245	350	210.6
SB32-10-2	18.5	1244	1794	318	245	350	212.7
SB32-10	18.5	1244	1794	318	245	350	213.7
SB32-11-2	22	1314	1894	358	265	350	258.8
SB32-11	22	1314	1894	358	265	350	258.8
SB32-12-2	22	1384	1964	358	265	350	260.8
SB32-12	22	1384	1964	358	265	350	260.8
SB32-13-2	30	1454	2114	420	295	400	348.2
SB32-13	30	1454	2114	420	295	400	348.2
SB32-14-2	30	1524	2184	420	295	400	351.3
SB32-14	30	1524	2184	420	295	400	351.3

Dimensions and weights




Pump type	Motor	58I,SBN					
		Dimension[mm]					Net weight [kg]
		DIN flange		D1	D2	D3	
P2 [kW]	H1	H2					
SBI,SBN 32-1-1	1.5	504	795	177	141	280	66.5
SBI,SBN 32-1	2.2	504	795	177	141	280	69.3
SBI,SBN 32-2-2	3	574	935	197	147	280	79.1
SBI,SBN 32-2	4	574	900	220	161	280	82.5
SBI,SBN 32-3-2	5.5	644	1006	235	197	300	105.1
SBI,SBN 32-3	5.5	644	1006	235	197	300	105.1
SBI,SBN 32-4-2	7.5	714	1112	235	197	300	114.5
SBI,SBN 32-4	7.5	714	1112	235	197	300	114.6
SBI,SBN 32-5-2	11	894	1399	318	245	350	159.2
SBI,SBN 32-5	11	894	1399	318	245	350	159.3
SBI,SBN 32-6-2	11	964	1469	318	245	350	162.3
SBI,SBN 32-6	11	964	1469	318	245	350	162.4
SBI,SBN 32-7-2	15	1034	1544	318	245	350	175.5
SBI,SBN 32-7	15	1034	1544	318	245	350	175.5
SBI,SBN 32-8-2	15	1104	1614	318	245	350	178.8
SBI,SBN 32-8	15	1104	1614	318	245	350	178.8
SBI,SBN 32-9-2	18.5	1174	1724	318	245	350	205.5
SBI,SBN 32-9	18.5	1174	1724	318	245	350	205.6
SBI,SBN 32-10-2	18.5	1244	1794	318	245	350	208.1
SBI,SBN 32-10	18.5	1244	1794	318	245	350	208.2
SBI,SBN 32-11-2	22	1314	1894	358	265	350	253.6
SBI,SBN 32-11	22	1314	1894	358	265	350	253.6
SBI,SBN 32-12-2	22	1384	1964	358	265	350	256.3
SBI,SBN 32-12	22	1384	1964	358	265	350	256.3
SBI,SBN 32-13-2	30	1454	2114	420	295	400	343.6
SBI,SBN 32-13	30	1454	2114	420	295	400	343.6
SBI,SBN 32-14-2	30	1524	2184	420	295	400	346.3
SBI,SBN 32-14	30	1524	2184	420	295	400	346.3

Dimensions and weights

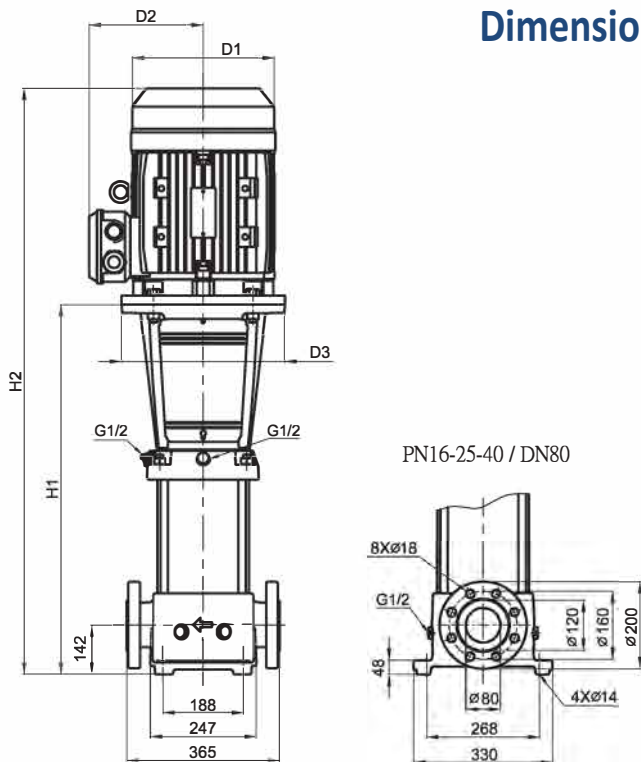


Pump type	Motor P2 [kW]	SB					Net weight [kg]	
		Dimension[mm]			D1	D2		D3
		DIN flange						
		H1	H2				DIN flange	
SB 45-1-1	3	561	877	197	147	280	91.7	
SB 45-1	4	561	887	220	161	280	95.1	
SB 45-2-2	5.5	641	1003	235	197	300	118.3	
SB 45-2	7.5	641	1039	235	197	300	124.6	
SB 45-3-2	11	831	1336	318	245	350	170.0	
SB 45-3	11	831	1336	318	245	350	170.0	
SB 45-4-2	15	911	1421	318	245	350	183.8	
SB 45-4	15	911	1421	318	245	350	183.8	
SB 45-5-2	18.5	991	1541	318	245	350	211.6	
SB 45-5	18.5	991	1541	318	245	350	211.6	
SB 45-6-2	22	1071	1651	358	265	350	258.1	
SB 45-6	22	1071	1651	358	265	350	258.1	
SB 45-7-2	30	1151	1811	420	295	400	346.4	
SB 45-7	30	1151	1811	420	295	400	346.5	
SB 45-8-2	30	1231	1891	420	295	400	350.2	
SB 45-8	30	1231	1891	420	295	400	351.3	
SB 45-9-2	30	1311	1971	420	295	400	354.0	
SB 45-9	37	1311	1971	420	295	400	375.0	
SB 45-10-2	37	1391	2051	420	295	400	378.7	
SB 45-10	37	1391	2051	420	295	400	378.7	
SB 45-11-2	45	1471	2161	470	325	450	430.5	
SB 45-11	45	1471	2161	470	325	450	430.5	
SB 45-12-2	45	1551	2241	470	325	450	434.2	
SB 45-12	45	1551	2241	470	325	450	434.2	
SB 45-13-2	45	1631	2321	470	325	450	437.9	

Dimensions and weights

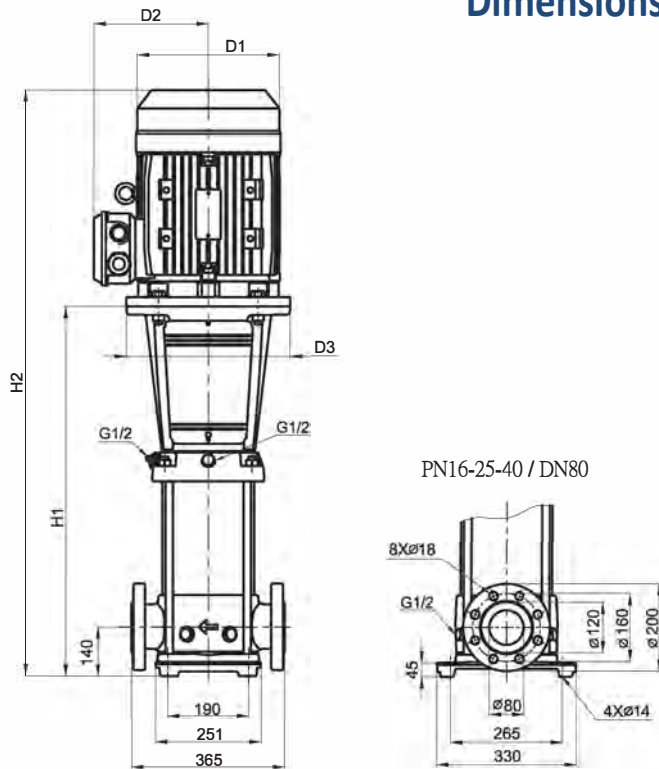


Pump type	Motor	SBI,SBN					
		Dimension[mm]					Net weight [kg]
	P2 [kW]	DIN flange		D1	D2	D3	
		H1	H2				
SBI,SBN45-1-1	3	559	875	197	147	280	82.9
SBI,SBN 45-1	4	559	885	220	161	280	86.3
SBI,SBN 45-2-2	5.5	639	1001	235	197	300	109.5
SBI,SBN 45-2	7.5	639	1037	235	197	300	115.8
SBI,SBN 45-3-2	11	829	1334	318	245	350	161.2
SBI,SBN 45-3	11	829	1334	318	245	350	161.2
SBI,SBN 45-4-2	15	909	1419	318	245	350	175.0
SBI,SBN 45-4	15	909	1419	318	245	350	175.0
SBI,SBN 45-5-2	18.5	989	1539	318	245	350	202.8
SBI,SBN 45-5	18.5	989	1539	318	245	350	202.8
SBI,SBN 45-6-2	22	1069	1649	358	265	350	249.3
SBI,SBN 45-6	22	1069	1649	358	265	350	249.3
SBI,SBN 45-7-2	30	1149	1809	420	295	400	337.7
SBI,SBN 45-7	30	1149	1809	420	295	400	337.7
SBI,SBN 45-8-2	30	1229	1889	420	295	400	341.4
SBI,SBN 45-8	30	1229	1889	420	295	400	341.5
SBI,SBN 45-9-2	30	1309	1969	420	295	400	345.2
SBI,SBN 45-9	37	1309	1969	420	295	400	366.2
SBI,SBN 45-10-2	37	1389	2049	420	295	400	369.9
SBI,SBN 45-10	37	1389	2049	420	295	400	369.9
SBI,SBN 45-11-2	45	1469	2159	470	325	450	421.7
SBI,SBN 45-11	45	1469	2159	470	325	450	421.7
SBI,SBN 45-12-2	45	1549	2239	470	325	450	425.4
SBI,SBN 45-12	45	1549	2239	470	325	450	425.4
SBI,SBN 45-13-2	45	1629	2319	470	325	450	429.1

Dimensions and weights

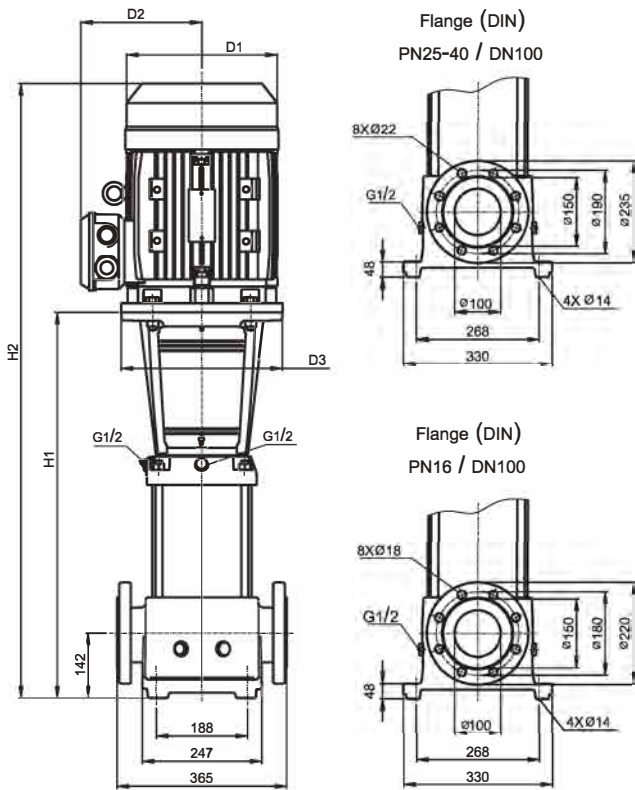


Pump type	Motor P2 [kW]	SB						Net weight [kg]
		Dimension[mm]					DIN flange	
		DIN flange		D1	D2	D3		
		H1	H2					
SB 64-1-1	4	563	889	220	161	280	88.9	
SB 64-1	5.5	563	925	235	197	300	108.3	
SB 64-2-2	7.5	646	1044	235	197	300	118.7	
SB 64-2-1	11	756	1261	318	245	350	160.3	
SB 64-2	11	756	1261	318	245	350	160.3	
SB 64-3-2	15	838	1348	318	245	350	174.9	
SB 64-3-1	15	838	1348	318	245	350	174.9	
SB 64-3	18.5	838	1388	318	245	350	198.9	
SB 64-4-2	18.5	921	1471	318	245	350	202.9	
SB 64-4-1	22	921	1501	358	265	350	245.7	
SB 64-4	22	921	1501	358	265	350	245.7	
SB 64-5-2	30	1003	1663	420	295	400	334.3	
SB 64-5-1	30	1003	1663	420	295	400	334.3	
SB 64-5	30	1003	1663	420	295	400	334.3	
SB 64-6-2	30	1086	1746	420	295	400	338.2	
SB 64-6-1	37	1086	1746	420	295	400	359.2	
SB 64-6	37	1086	1746	420	295	400	359.2	
SB 64-7-2	37	1168	1828	420	295	400	363.3	
SB 64-7-1	37	1168	1828	420	295	400	363.3	
SB 64-7	45	1172	1862	470	325	450	411.4	
SB 64-8-2	45	1255	1945	470	325	450	415.5	
SB 64-8-1	45	1255	1945	470	325	450	415.5	

Dimensions and weights

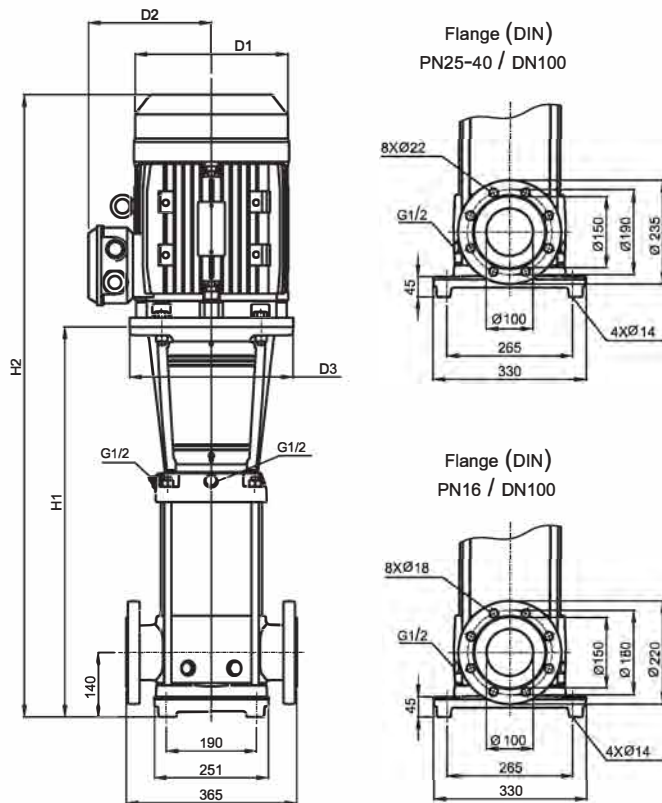


Pump type	Motor P2 [kW]	SBI,SBN Dimension[mm]					Net weight [kg]
		DIN flange		D1	D2	D3	
		H1	H2				DIN flange
SBI,SBN 64-1-1	4	563	889	220	161	280	81.8
SBI,SBN 64-1	5.5	563	925	235	197	300	101.3
SBI,SBN 64-2-2	7.5	646	1044	235	197	300	111.7
SBI,SBN 64-2-1	11	756	1261	318	245	350	153.3
SBI,SBN 64-2	11	756	1261	318	245	350	153.3
SBI,SBN 64-3-2	15	838	1348	318	245	350	167.4
SBI,SBN 64-3-1	15	838	1348	318	245	350	167.4
SBI,SBN 64-3	18.5	838	1388	318	245	350	191.4
SBI,SBN 64-4-2	18.5	921	1471	318	245	350	195.4
SBI,SBN 64-4-1	22	921	1501	358	265	350	238.1
SBI,SBN 64-4	22	921	1501	358	265	350	238.1
SBI,SBN 64-5-2	30	1003	1663	420	295	400	326.7
SBI,SBN 64-5-1	30	1003	1663	420	295	400	326.7
SBI,SBN 64-5	30	1003	1663	420	295	400	326.7
SBI,SBN 64-6-2	30	1086	1746	420	295	400	330.7
SBI,SBN 64-6-1	37	1086	1746	420	295	400	351.7
SBI,SBN 64-6	37	1086	1746	420	295	400	351.7
SBI,SBN 64-7-2	37	1168	1828	420	295	400	355.7
SBI,SBN 64-7-1	37	1168	1828	420	295	400	355.7
SBI,SBN 64-7	45	1172	1862	470	325	450	403.8
SBI,SBN 64-8-2	45	1255	1945	470	325	450	408.0
SBI,SBN 64-8-1	45	1255	1945	470	325	450	408.0

Dimensions and weights

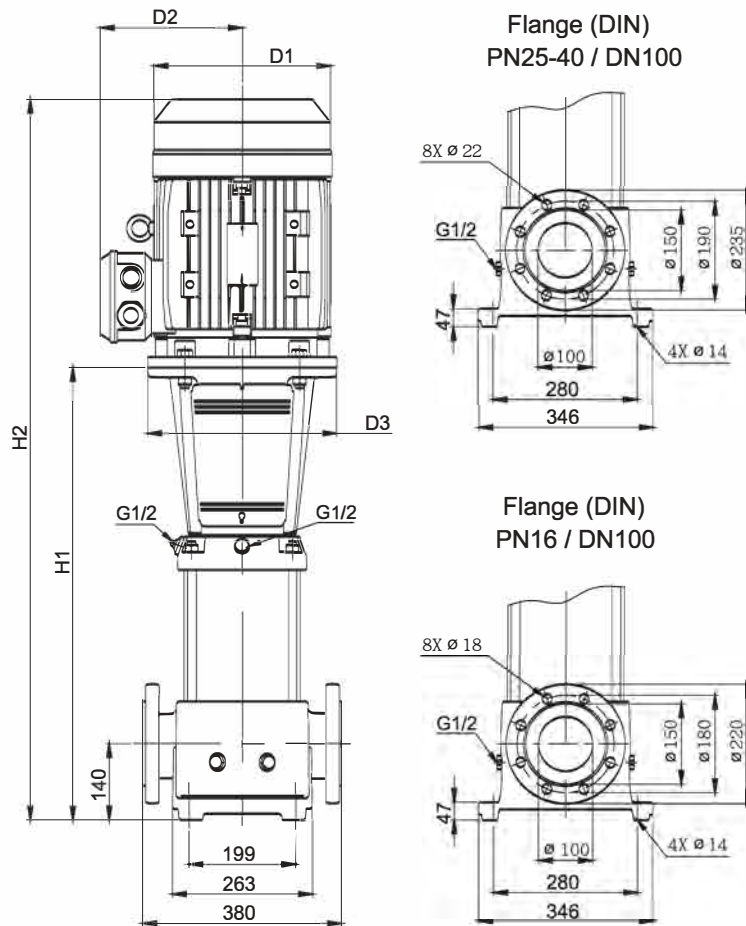


Pump type	Motor	SB					Net weight [kg]
		Dimension [mm]					
	P2 [kW]	DIN flange		D1	D2	D3	DIN flange
		H1	H2				
SB 90-1-1	5.5	572	934	235	197	300	122.2
SB 90-1	7.5	572	970	235	197	300	128.5
SB 90-2-2	11	774	1279	318	245	350	175.4
SB 90-2	15	774	1284	318	245	350	185.4
SB 90-3-2	18.5	866	1416	318	245	350	214.7
SB 90-3	22	866	1446	358	265	350	257.5
SB 90-4-2	30	958	1618	420	295	400	347.3
SB 90-4	30	958	1618	420	295	400	347.3
SB 90-5-2	37	1050	1710	420	295	400	347.9
SB 90-5	37	1050	1710	420	295	400	347.9
SB 90-6-2	45	1142	1832	470	325	450	428.2
SB 90-6	45	1142	1832	470	325	450	428.3

Dimensions and weights

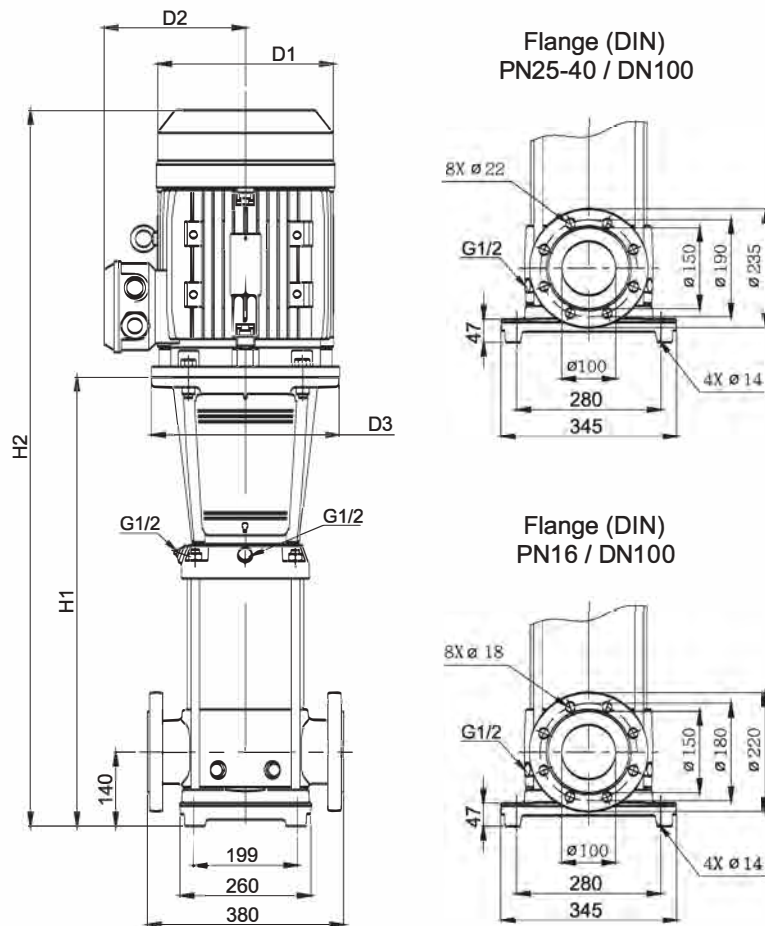


Pump type	Motor	SBI,SBN					Net weight [kg]
		Dimension[mm]			D1	D2	
	P2 [kW]	DIN flange					
		H1	H2	DIN flange			
SBI,SBN 90-1-1	5.5	576	938	235	197	300	112.1
SBI,SBN 90-1	7.5	576	974	235	197	300	118.4
SBI,SBN 90-2-2	11	778	1283	318	245	350	165.2
SBI,SBN 90-2	15	778	1288	318	245	350	175.2
SBI,SBN 90-3-2	18.5	870	1420	318	245	350	204.4
SBI,SBN 90-3	22	870	1450	358	265	350	247.2
SBI,SBN 90-4-2	30	962	1622	420	295	400	336.9
SBI,SBN 90-4	30	962	1622	420	295	400	336.9
SBI,SBN 90-5-2	37	1054	1714	420	295	400	364.9
SBI,SBN 90-5	37	1054	1714	420	295	400	365.0
SBI,SBN 90-6-2	45	1146	1836	470	325	450	418.0
SBI,SBN 90-6	45	1146	1836	470	325	450	418.1

Dimensions and weights

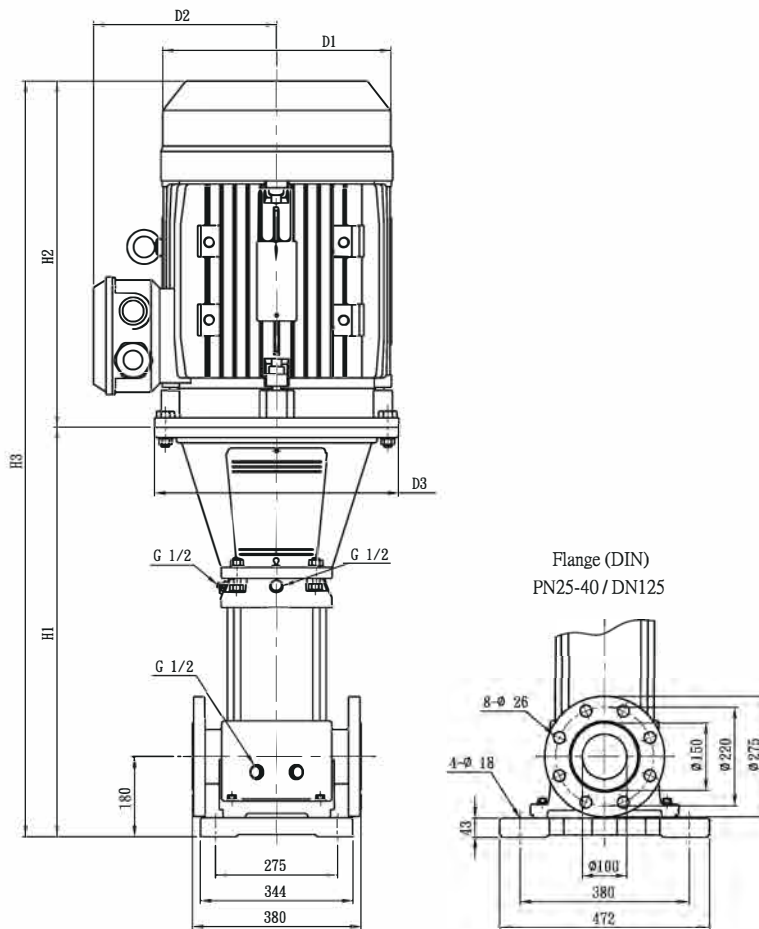


Pump type	Motor	SB						Net weight [kg]
		Dimension[mm]			D1	D2	D3	
	P2 [kW]	DIN flange		DIN flange				
		H1	H2	H3				
SB120-1	11	834	505	1339	318	245	350	201.1
SB 120-2-1	18.5	990	550	1540	318	245	350	245.1
SB120-2	22	990	580	1570	358	265	350	291.8
SB120-3	30	1145	660	1805	420	295	400	382.5
SB 120-4-1	37	1301	660	1961	420	295	400	413.5
SB120-5-1	45	1460	690	2150	470	325	450	471.6
SB120-6-1	55	1642	770	2412	510	355	550	604.8
SB120-7	75	1797	845	2642	580	410	550	736.4

Dimensions and weights

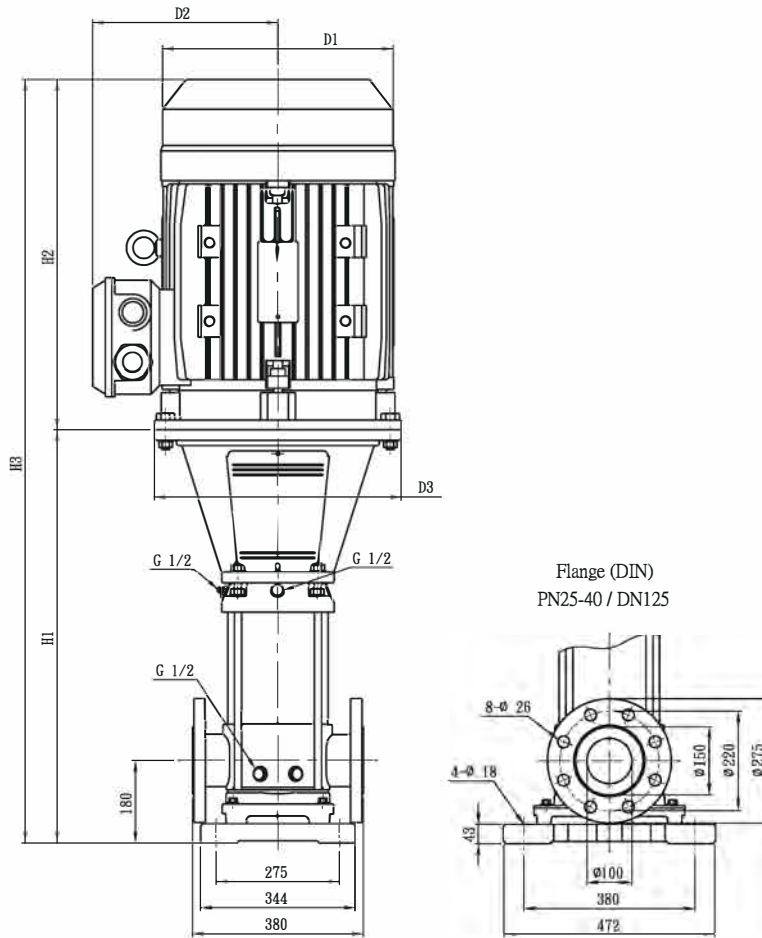


Pump type	Motor	SBI,SBN						Net weight [kg]
		Dimension[mm]					DIN flange	
	P2 [kW]	DIN flange			D1	D2		D3
		H1	H2	H3				
S81,SBN 120-1	11	837	505	1342	318	245	350	185.3
S81,SBN 120-2-1	18.5	993	550	1543	318	245	350	229.5
S81,SBN 120-2	22	993	580	1573	358	265	350	276.1
S81,SBN 120-3	30	1149	660	1809	420	295	400	366.9
S81,SBN 120-4-1	37	1304	660	1964	420	295	400	398.1
S81,SBN 120-5-1	45	1463	690	2153	470	325	450	456.3
S81,SBN 120-6-1	55	1645	770	2415	510	355	550	589.8
S81,SBN 120-7	75	1800	845	2645	580	410	550	721.5

Dimensions and weights

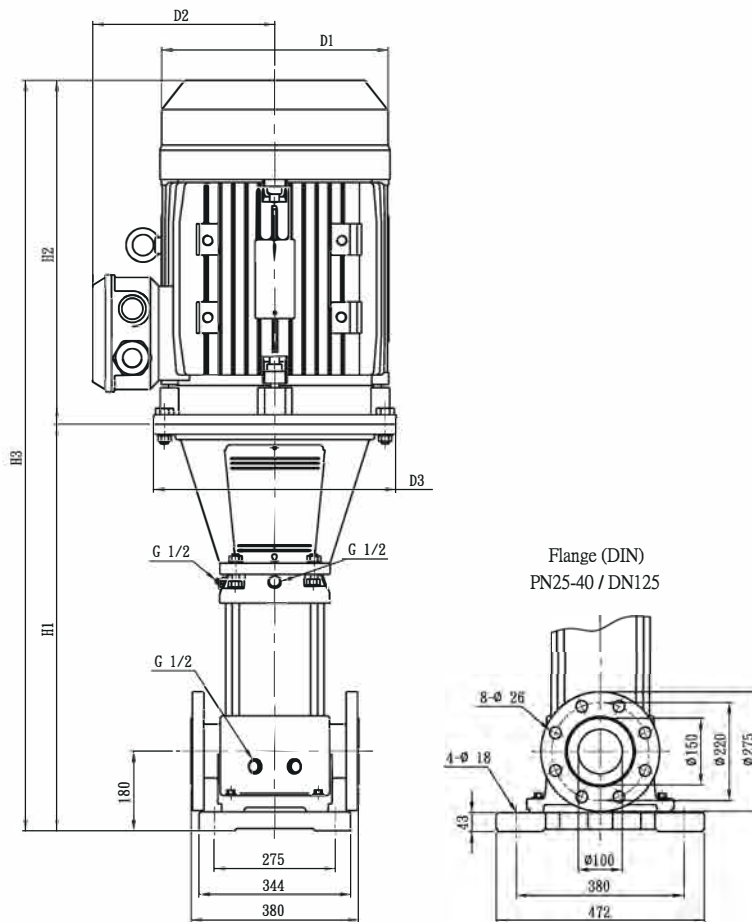

Pump type	Motor	SB						Net weight [kg]
		Dimension[mm]			D1	D2	D3	
	P2 [kW]	DIN flange		DIN flange				
		H1	H2	HJ				
SB 150-1-1	11	834	505	1339	318	245	350	201.0
SB 150-1	15	834	510	1344	318	245	350	211.0
SB 150-2-1	22	990	580	1570	358	265	350	287.8
SB 150-3-2	30	1145	660	1805	420	295	400	382.3
SB 150-3	37	1145	660	1805	420	295	400	403.4
SB 150-4-1	45	1305	690	1995	470	325	450	461.4
SB 150-5-2	55	1486	770	2256	510	355	550	594.7
SB 150-6	75	1642	845	2487	580	410	550	726.0

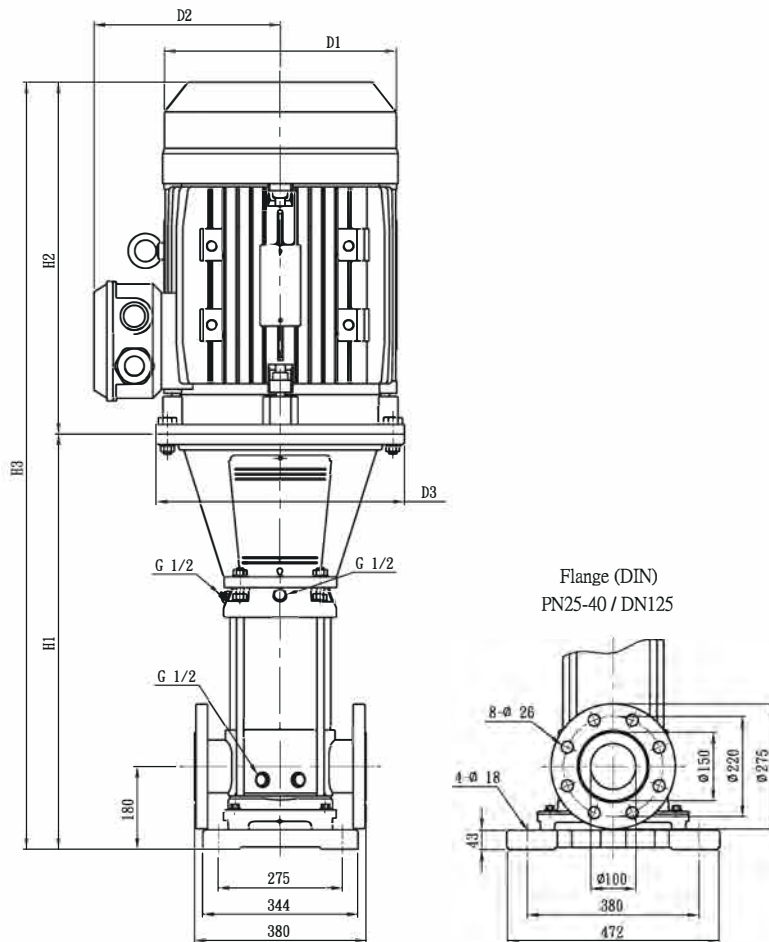Dimensions and weights-SBI,SBN150


Pump type	Motor	SBI,SBN						Net weight [kg]
		Dimension[mm]					DIN flange	
	P ₂ [kW]	DIN flange			D1	D2		D3
		H1	H2	H3				
SBI,SBN 150-1-1	11	837	505	1342	318	245	350	174.4
SBI,SBN 150-1	15	837	510	1347	318	245	350	184.4
SBI,SBN 150-2-1	22	993	580	1573	358	265	350	271.6
SBI,SBN 150-3-2	30	1148	660	1808	420	295	400	366.2
SBI,SBN 150-3	37	1148	660	1808	420	295	400	387.2
SBI,SBN 150-4-1	45	1308	690	1998	470	325	450	445.4
SBI,SBN 150-5-2	55	1489	770	2259	510	355	550	580.8
SBI,SBN 150-6	75	1645	845	2490	580	410	550	710.5

Pumped Liquids

SB (I, N) pumps can handle a wide variety of liquids, each with its own characteristic.

SB{I}

Non-corrosive liquids

For fluid transfer, circulation and pressure boosting of cold or hot clean water.

SBN

Industrial liquids

Light acids

The fluids covered in the list are not complete. Data on the application limits of different pump materials when handling any of the listed fluids are considered to be the best choices. However, the table is intended as a general guide only, and cannot replace actual testing of the pumped fluids and pump materials under specific working conditions.

When choosing the pump version, sufficient attention should be given to the flow medium, such as density, solidification point, viscosity as well as ex-protection requirement. The limits of applicability of the pumps, based on pressure and temperature must also be considered.

● Recommended

Pumped fluid	"Fluid Concentration, temperature"	SB (I)		SBN	
		EPDM	Viton	EPDM	Viton
Acetic acid anhydride	25°C			●	
Alkaline cleaner		●			
Aluminium sulphate	10%,25°C				●
Ammonia water (A. hydroxide)	20%,40°C	●			
Ammonia hydrogen carbonate	10%,40°C	●		●	
Benzoic acid	10%,90°C				●
Boric acid	Unsaturated solution,60°C				●
Butanol	60°C	●			
Calcium acetate	30%,50°C	●			
Calcium hydroxide	Saturated solution,50°C	●			
Chromic acid	1%,20°C				●
Condensate	90°C	●			
Copper sulphate	Unsaturated solution,60°C				●
Deionic (fully desalinated water)	50°C			●	
Ethanol	100%,20°C	●			
Ethylene glycol/Diethylene glycol	40%,70°C	●	●	●	●
Fixer	25°C				●
Formic acid	5%,20°C			●	

Pumped fluid	"Fluid Concentration, temperature"	SB (I)		SBN	
		EPDM	Viton	EPDM	Viton
Fruit juice	50 ° (●
Glycerine	50%, 50 ° (●			
Heating oil (Light)		●			●
Hydraulic oil	100%, 100 ° (●		
Isopropanol		●			
Lactic acid	10%, 20 ° (●
Linoleic acid	100%, 20 ° (●			
Linseed oil	60 ° (●		
Liqueur	60 ° (●
Maize oil	80 ° (●		
Maleic acid	50%, 50 ° (●
Methanol	100%, 20 ° (●			
Motor oil	100%, 80 ° (●			
Oil-water-mixture	100 ° (●		
Oxalic acid	1%, 20 ° (●	
Peanut oil	100%, 80 ° (●		
Phosphoric acid	20%, 20 ° (●	
Polyglycols	90 ° (●		●
Polyethylene glycols	40%, 70 ° (●			
Potassium carbonate	10%, 60 ° (●			
Potassium hydrogen carbonate	10%, 60 ° (●			
Potassium permanganate	5%, 20 ° (●	
Potassium sulphate	Unsaturated solution, 80 ° C			●	
Rapeseed oil	100%, 80 ° (●		
Silicone oil	100%		●		
Sodium carbonate	10%, 60 ° (●	
Sodium hydroxide	25%, 50 ° (●	
Sodium nitrate	Unsaturated solution, 80 ° C			●	
Sodium phosphate	5%, 100 ° (●	
Sodium sulphate	10%, 60 ° (●	
Sulphuric acid	5%, 25 ° (●
Water					
Swimming pool water	35 ° (● SBI		●	
Deionic	50 ° (●	
Distilled water	50 ° (●	
Decarbonated water				●	
Soft water				●	
Heating water				●	
Boiler water				●	
Pure water				●	
Rinsing water		● SBI		●	